Channel Modelling – ETIM10

Lecture no: **8**

Antennas
Multiple antenna systems

Fredrik Tufvesson
Department of Electrical and Information Technology
Lund University, Sweden
Fredrik.Tufvesson@eit.lth.se

Antennas in real channels

- One important aspect is how the channel and antenna interact
  - The antenna pattern determines what the system sees
  - Delay spread and angular spread affected by the antenna pattern

- The user may have a large influence on the behavior of the antenna
  - Change in antenna pattern
  - Change in efficiency – mismatch

What is “the antenna(s)”?

What do we mean by real channels?

At the mobile side:

- Mock-up terminals (handsets, lap-tops) with antenna and casing
- Near-by scattering environments
  - User influence
  - Indoor environments
  - In vehicles

At the base station side:

- Type of installation – roof-top, wall mount.
- Obstacles or buildings near-by or obstructive to the installation

Important antenna parameters

- Directivity
  - Total power in a certain direction compared to total transmitted power
- Efficiency

$$\eta = \frac{R_{rad}}{R_{rad} + R_{ohmic} + R_{match}}$$

$$\eta = \underbrace{\frac{R_{rad}}{R_{rad} + R_{ohmic}}}_{\eta_{rad}} \underbrace{\left(1 - |\Gamma|^2\right)}_{\eta_{match}}$$

- Q-factor
  - Stored energy compared to dissipated energy
- Mean effective gain
  - Include influence of random channel
  - Average received power compared to average received power by isotropic antenna in real environment
- Polarization
- Bandwidth

Example, antenna pattern

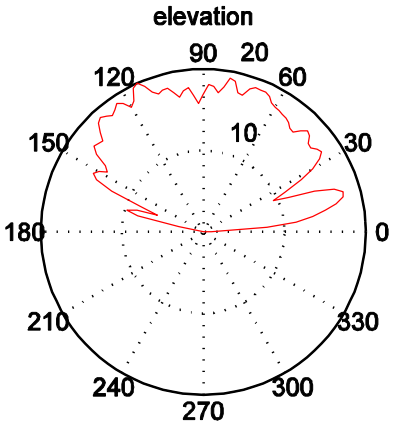

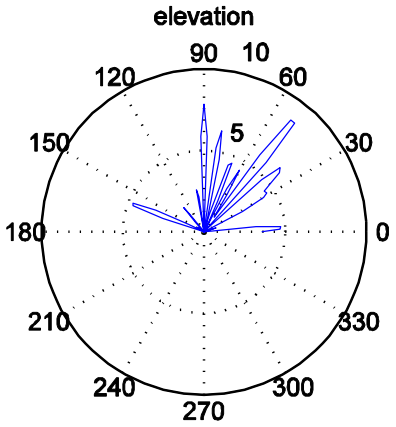

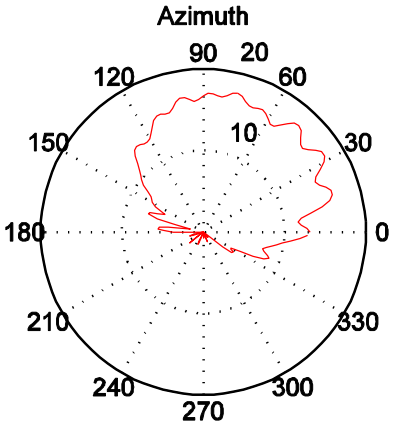

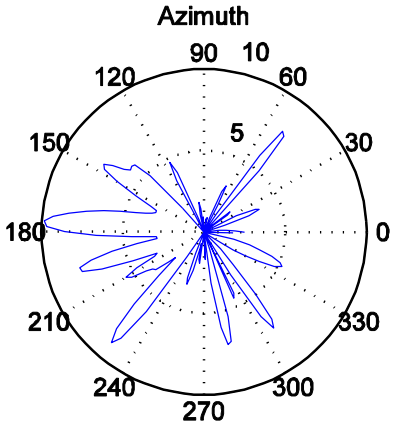

3D antenna pattern

Polarization state also relevant…

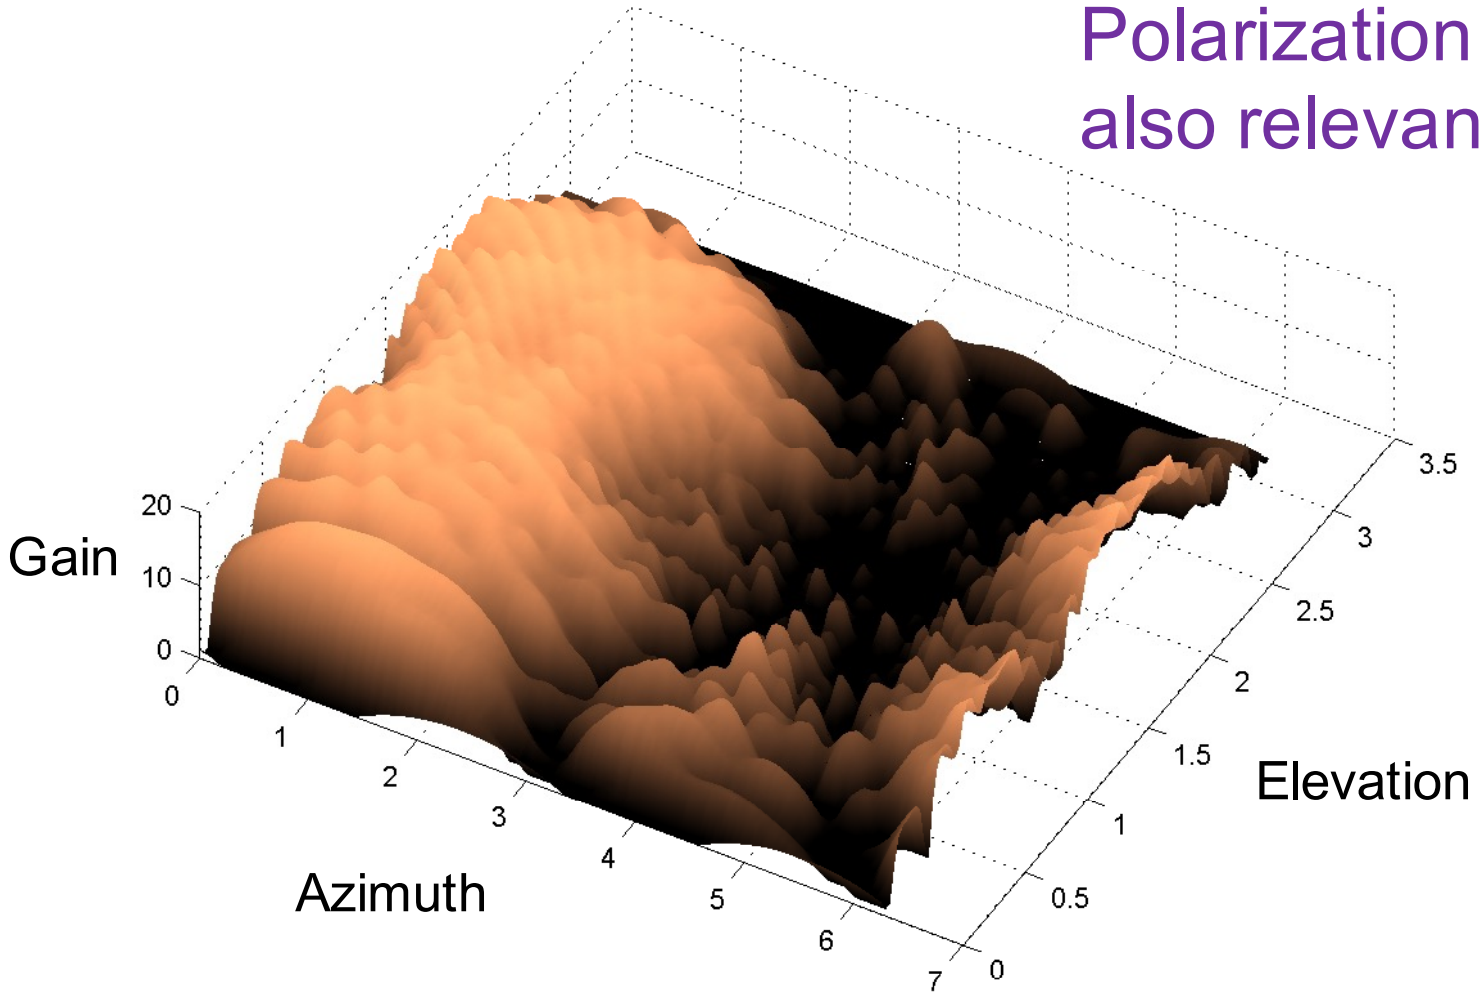

Influence of a user

Talk mode

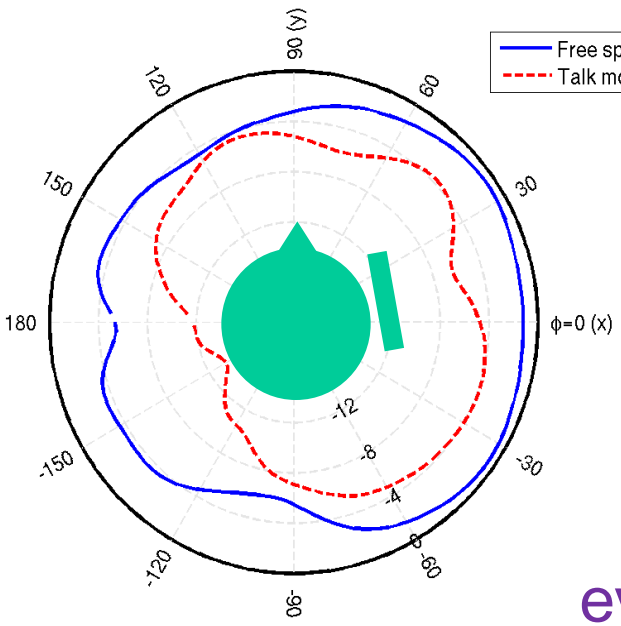

Data mode

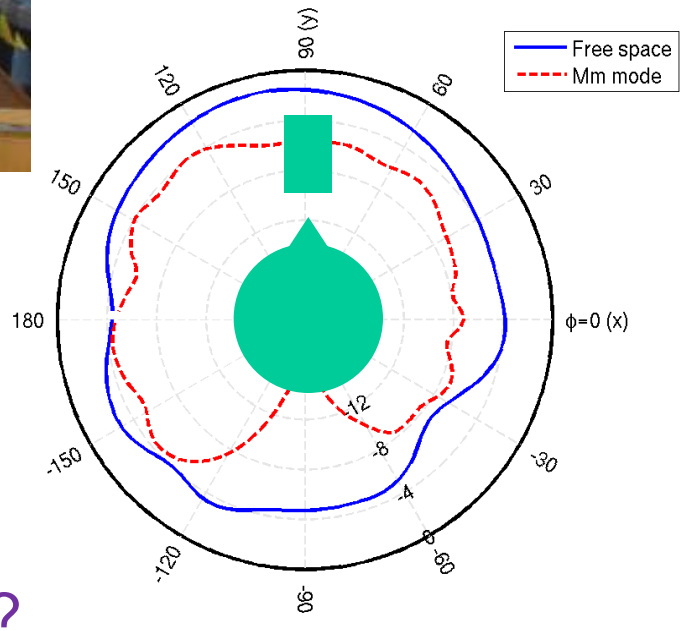

Why lower gain across the head even in free space?

Influence of a user - continued

Channel Characteristics and User Body Effects in an Outdoor Urban Scenario at 15 and 28 GHz

Paper submitted in 2016 to TAP:

Kun Zhao, Carl Gustafson, *Member, IEEE*, Qingbi Liao, Shuai Zhang, Thomas Bolin, Zhinong Ying, *Senior Member, IEEE* and Sailing He, *Fellow, IEEE*

Influence of a user - continued

	15 GHz	28 GHz
Free space	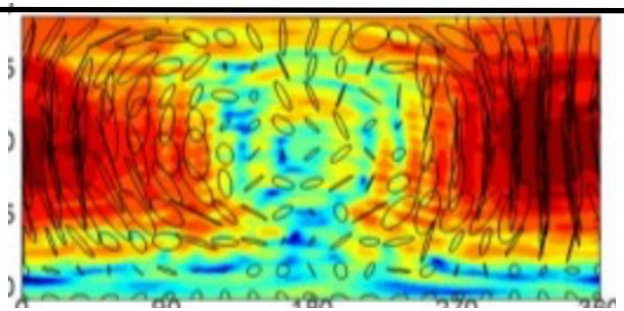	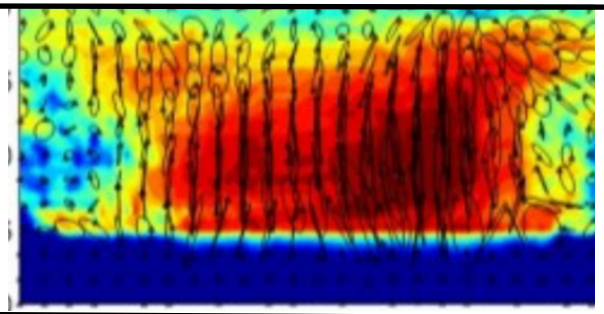
Data mode 	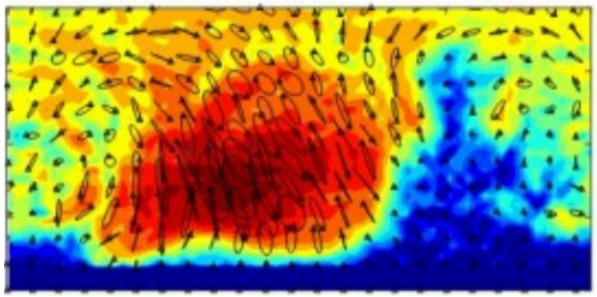	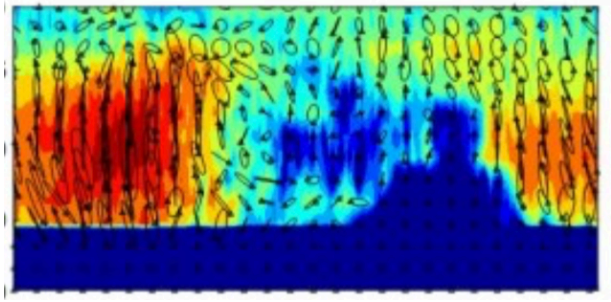
Talk mode 	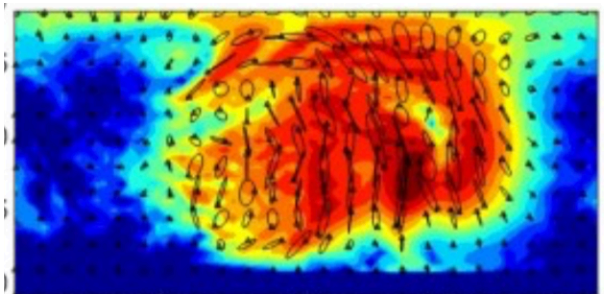	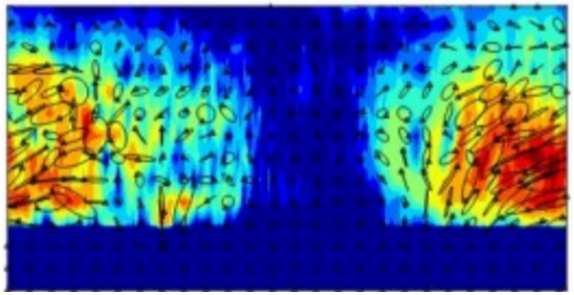

Common antenna types

- Linear antennas (dipole, monopole)
- Helical antennas
- Microstrip antennas
- PIFA and RCDLA antennas

Linear antennas

- Hertzian dipole (short dipole)
  - Antenna pattern:

$$\widetilde{G}(\varphi,\theta) \propto \sin(\theta)$$

  - Gain

$$G_{\max} = 1.5$$

- λ/2 dipole
  - Pattern

$$\widetilde{G}(\varphi,\theta) \propto \frac{\cos\left(\frac{\pi}{2}\cos(\theta)\right)}{\sin(\theta)}$$

  - Gain

$$G_{\max} = 1.64$$

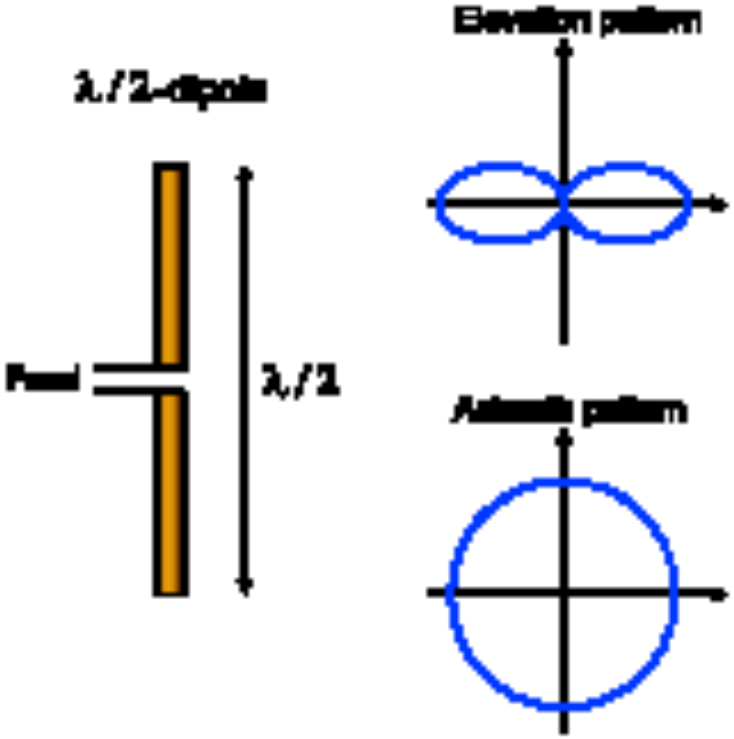

Helical antenna

- Combination of loop antenna and linear antenna
  - If dimensions much smaller than wavelength, behaves like linear antenna
  - Bandwidth, efficiency, and radiation resistance increase with increasing *h*

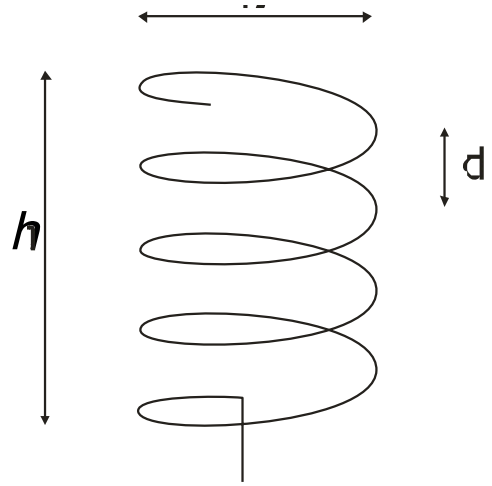

Microstrip antennas

- Dielectric substrate with ground plane on one side, and metallic patch on the other
- Properties determined by
  - Shape of patch: size must be at least $L = 0.5\lambda_{\text{substrate}}$
  - Dielectric properties of substrate $\lambda_{\text{substrate}} = \lambda_0 / \sqrt{\varepsilon_r}$

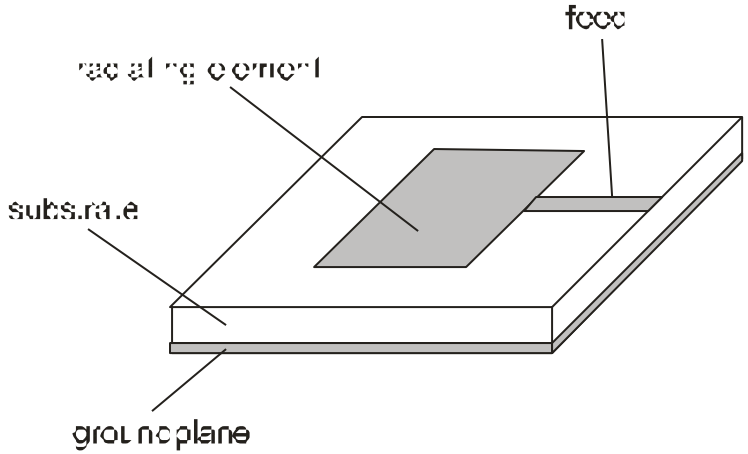

- Advantages:
  - Small; can be manufactured cheaply
  - feedlines can be manufactured on same substrate as antenna
  - can be integrated into the MS, without sticking out from the casing
- Drawbacks:
  - Low bandwidth
  - Low efficiency

PIFA and RCDLA

- PIFA (Planar inverted F antenna)

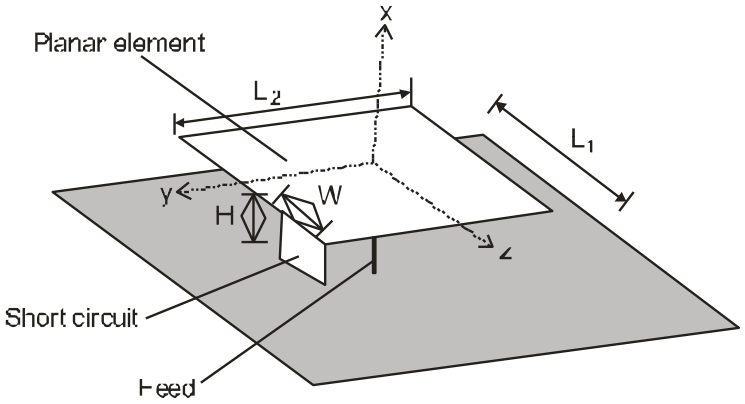

- RCDLA (Radiation-coupled dual-L antenna)

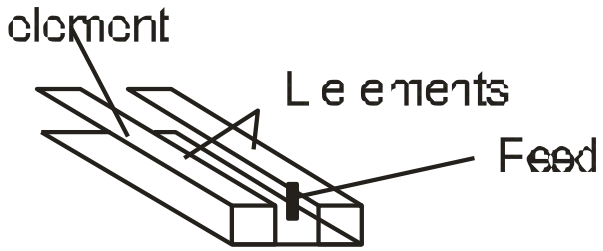

Mobile station antennas

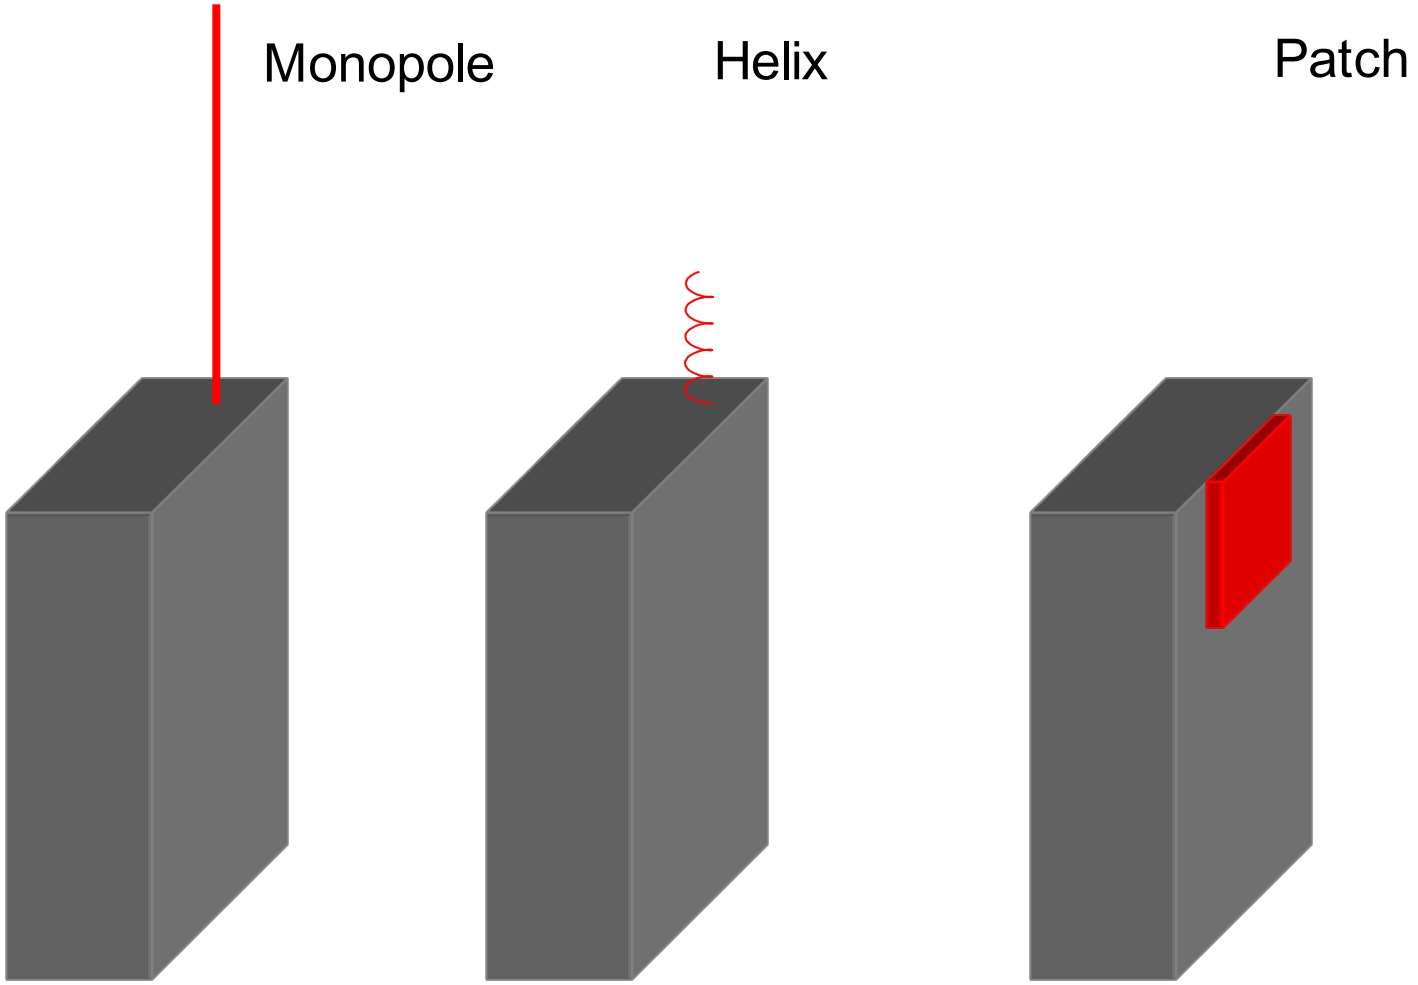

Impact of user on MS antenna

The efficiency depends on many parameters, but a very important one is its environment. Below you can see differences in antenna efficiency for 42 test persons holding the mobile.

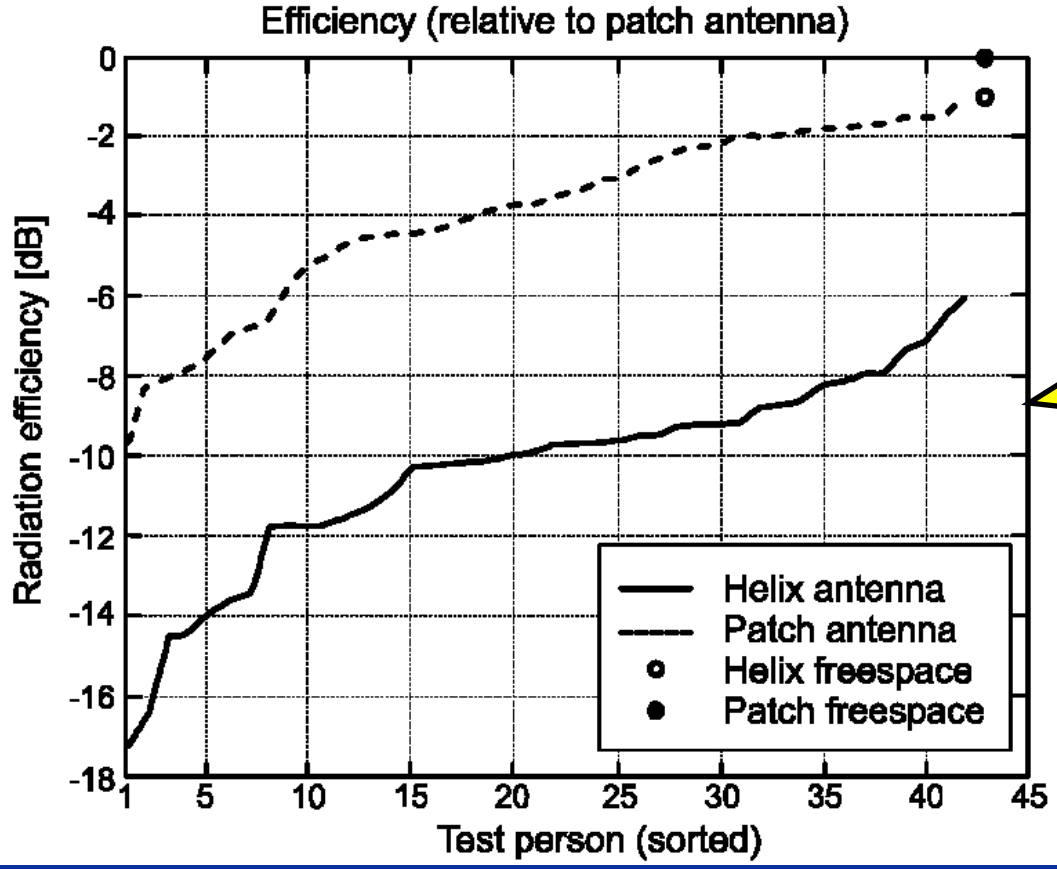

Up to around 10 dB difference, depending on person.

What is a “typical” person/grip position? (e.g. Death grip for I-Phone 4)

Multiband antennas

- For many applications, different wireless services need to be covered
- Example: cellular handset
  - GSM 900
  - GSM 1800
  - GSM 1900
  - Bluetooth

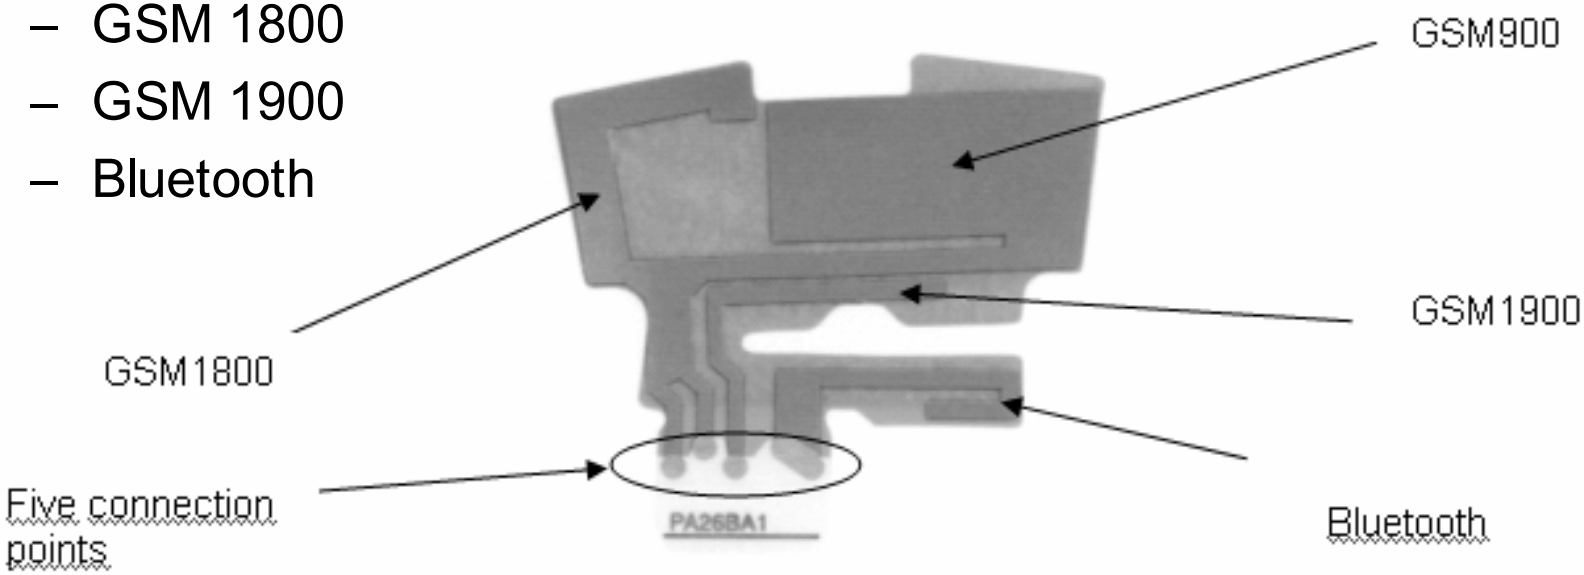

Base station antennas

Courtesey: Andrew Corp.

Base station antennas

Base station antenna pattern affected by the mast (30 cm from antenna).

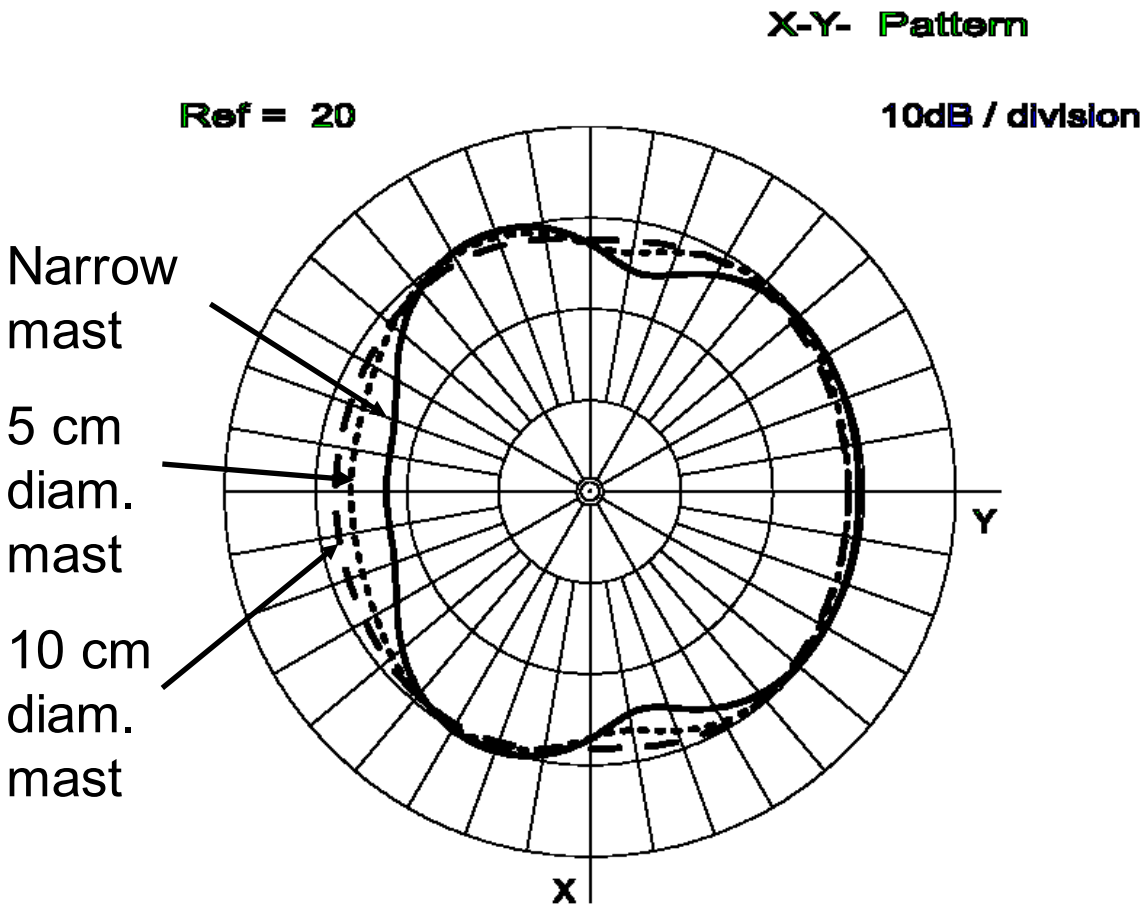

Base station antennas

Base station antenna pattern affected by a concrete foundation.

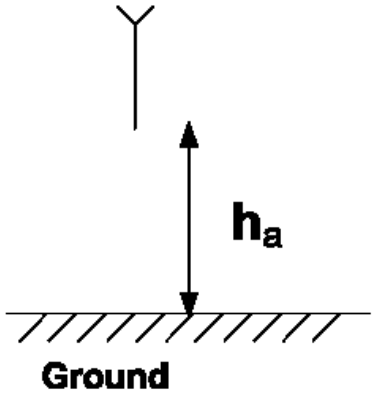

a)

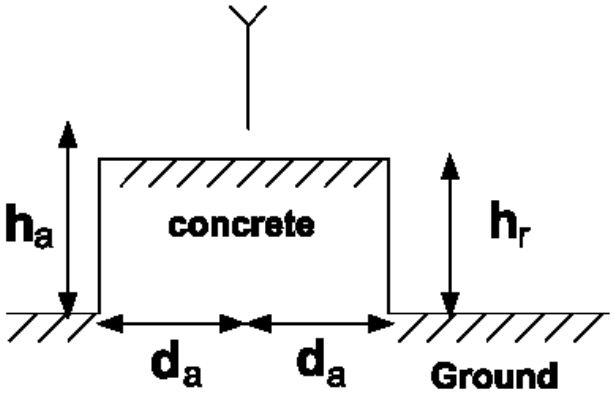

b)

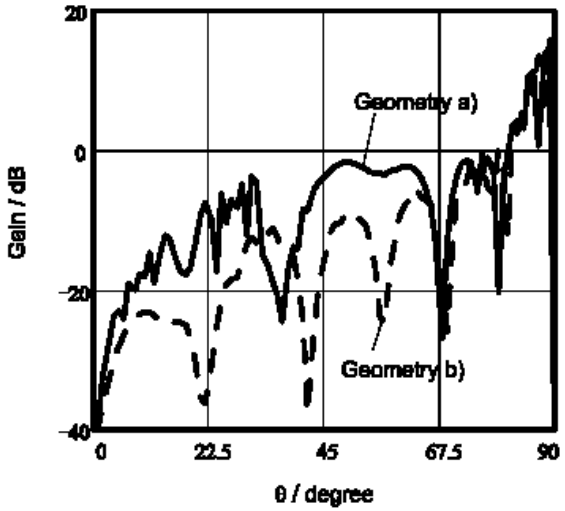

c)

Multiple antenna systems

- What are MIMO systems?

  A MIMO system consists of several antenna elements, plus adaptive signal processing, at both transmitter and receiver, the combination of which exploits the **spatial dimension** of the mobile radio channel.

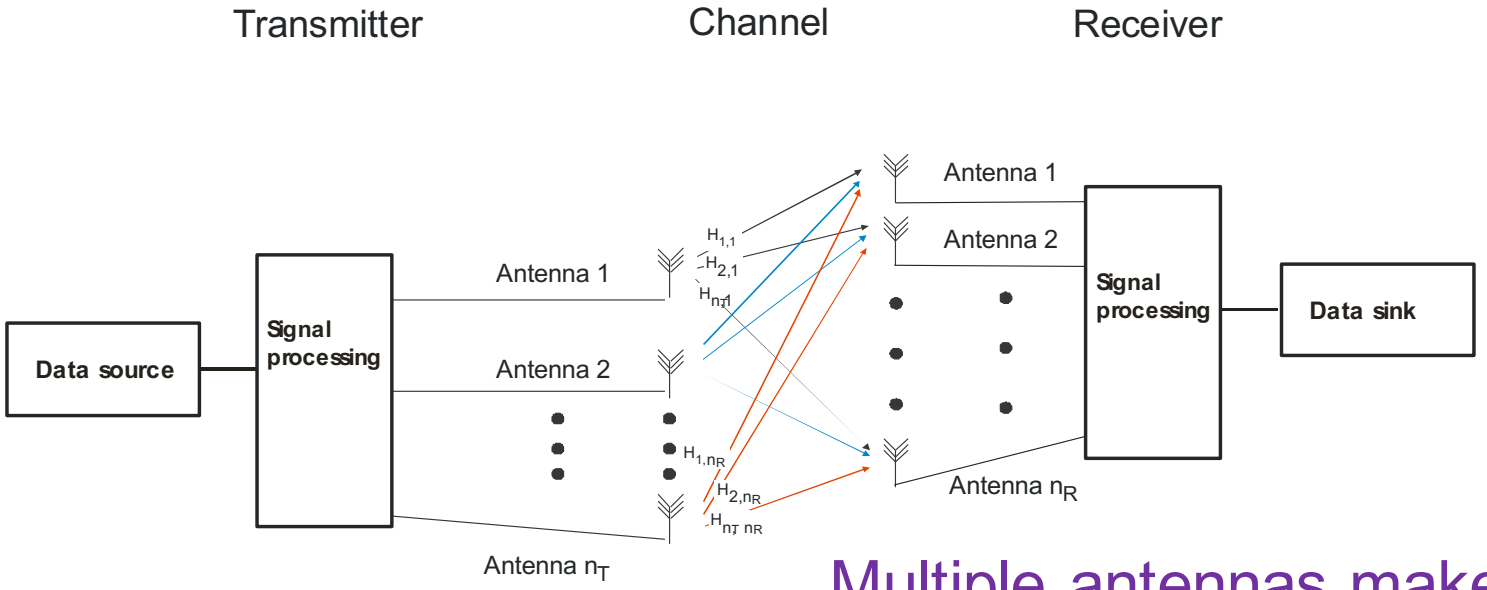

Multiple antennas make the transceiver spatially sensitive

Benefits

- We can gain
  - higher capacity (bits/s/Hz)

    spectrum is expensive; number of base stations limited
  - better transmission quality
  - increased coverage
  - improved user position estimation

Goals of MIMO

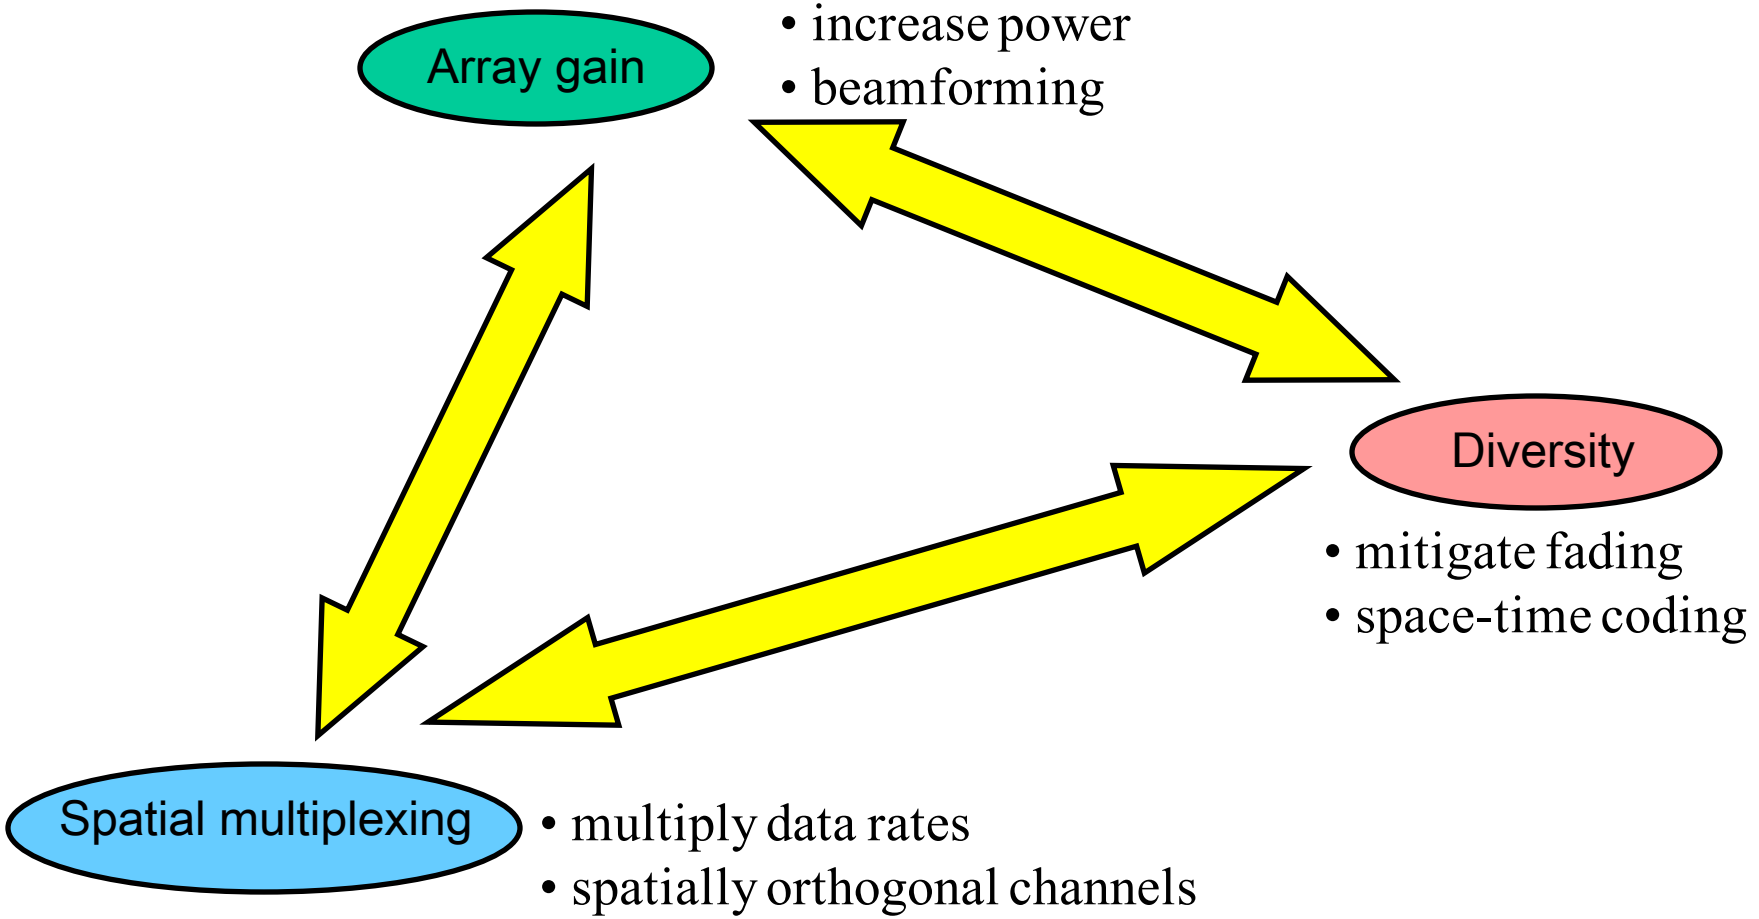

How about interference?

Goals of MIMO

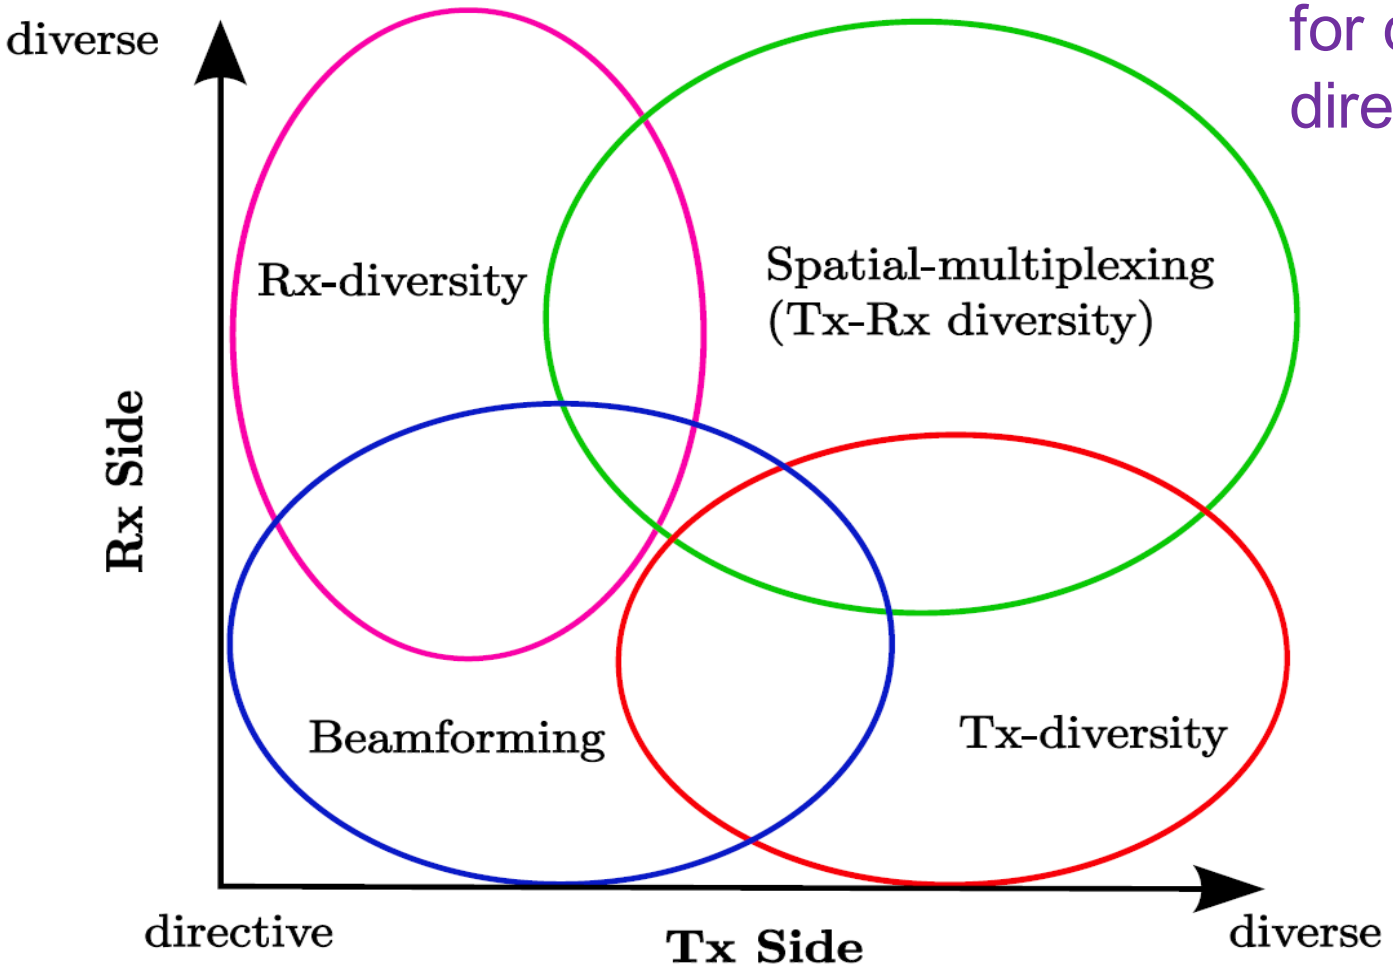

Antenna spacing for diverse vs. directive modes?

Array gain

- Directional antennas have gain
- Received power:

$$P_R = G_T G_R P_T (\lambda / 4\pi d)^2$$

- Mobile station moves: follow user with main beam of BS; point main beam of MS to BS

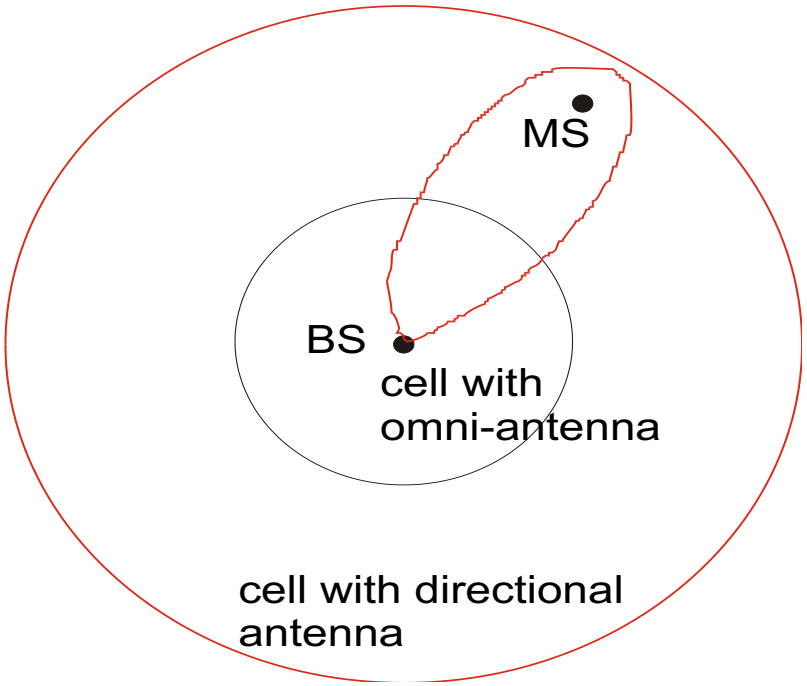

Diversity vs. beamforming

- Diversity: statistical independence of elements
- Beamforming: coherence between elements

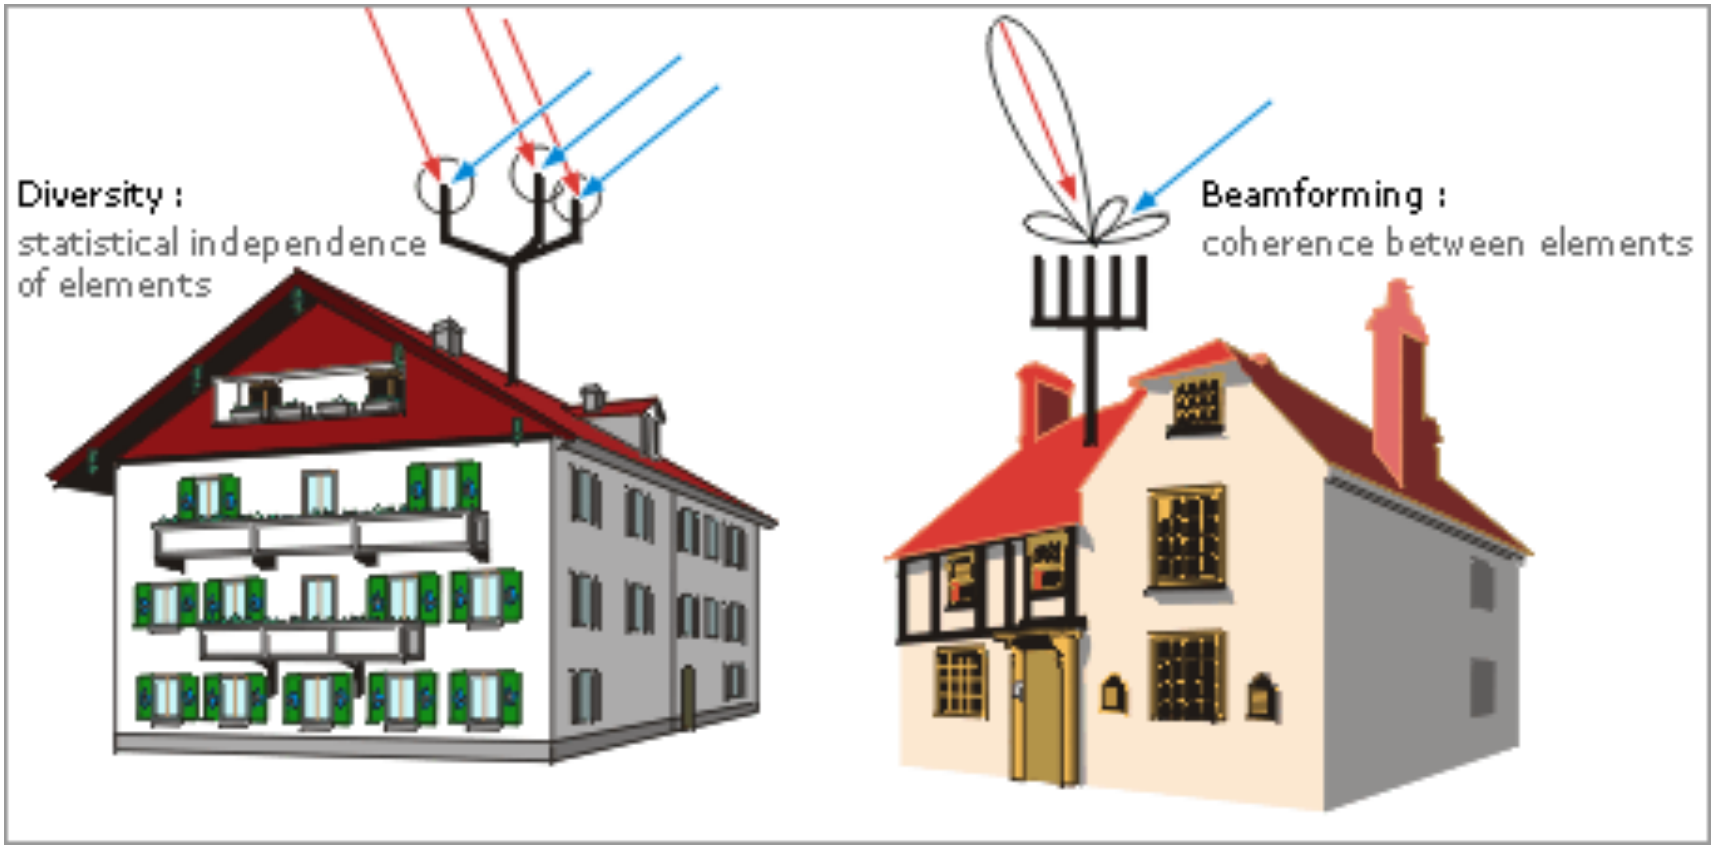

Spatial multiplexing

- Each MPC can carry independent data stream
- Beamforming view:
  - TX antenna “targets” energy onto one scatterer
  - RX antenna receives only from that direction
- Capacity goes linearly with number of antennas

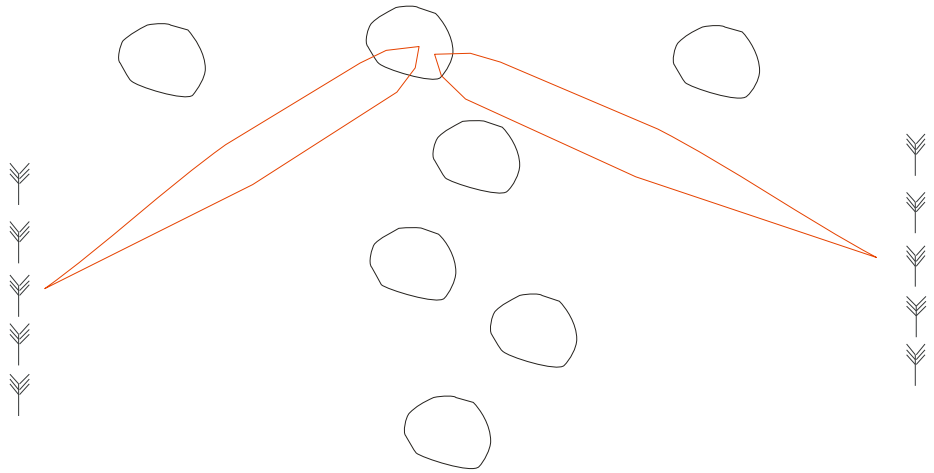

History

- Diversity:
  - Receive diversity: since 1940s
  - Transmit diversity: early 1990s
    - Wittneben; Winters
  - Space-time codes in late 1990s
    - Tarokh et al.; Alamouti
- Spatial multiplexing:
  - Invented by Winters 1987
  - Theoretical treatment in mid-1990s
    - Paulraj; Foschini&Gans; Telatar; Raleigh and Cioffi

Examples of wireless systems with MIMO technology?

Signal model

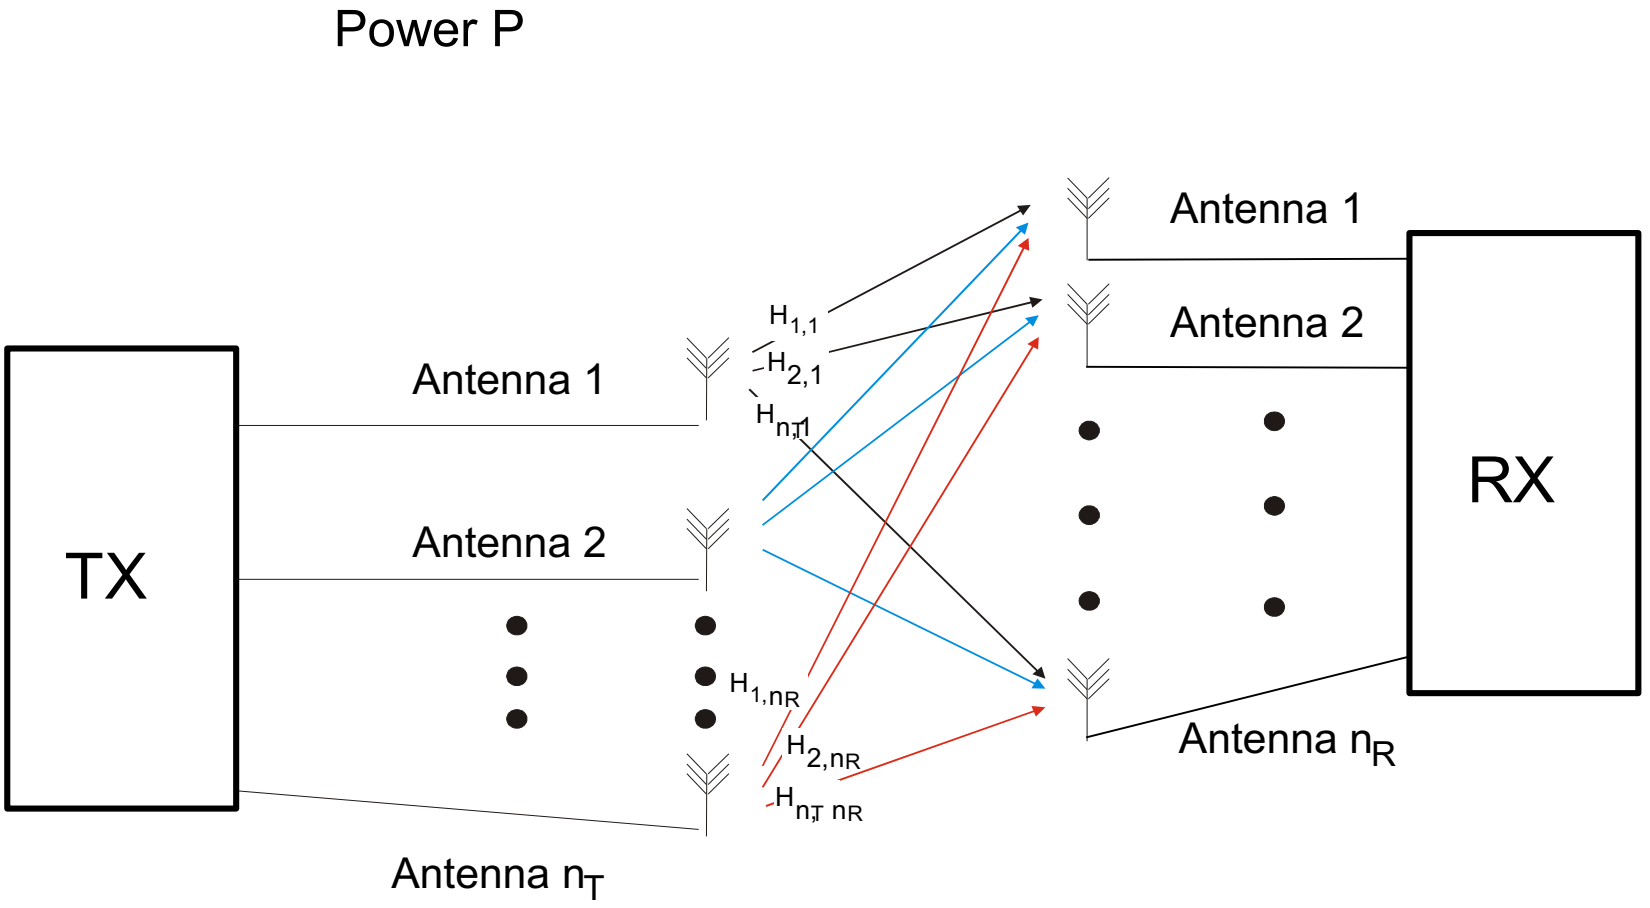

H...transfer function

γ...SNR at each receiver branch

Narrow-band vs broad-band models

- For a narrow-band channel:

$\mathbf{H}$ is an $n_{\mathrm{Rx}} \times n_{\mathrm{Tx}}$ matrix.

$$\mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{n}, \text{ where}$$

$$\mathbf{y} = [y_1 \; y_2 \; \ldots \; y_{n_{Rx}}]^{\mathrm{T}}, \quad \longleftarrow \text{receive signal vector}$$

$$\mathbf{x} = [x_1 \; x_2 \; \ldots \; x_{n_{Tx}}]^{\mathrm{T}}, \quad \longleftarrow \text{transmit signal vector}$$

$\mathbf{n}$ is a noise vector where :

$$\mathbb{E}\left[\mathbf{n}\mathbf{n}^{\mathrm{H}}\right] = \sigma^2 \mathbb{I}_{n_{Rx} \times n_{Rx}}$$

- Ideally, H is assumed to be i.i.d. ⟵ Often not true!
- Wideband channel matrix entries are frequency dependent

Capacity formula

- Instantaneous channel characterized by matrix ***H***
- Shannon's formula (for two-dimensional symbols):

$$C = \log_2(1 + \gamma \,|\, H \,|^2) bits / s / Hz$$

- Foschini's formula:

$$C = \log_2\left(\det\left[\boldsymbol{I}_{n_R} + \frac{\gamma}{n_T} \boldsymbol{H}\boldsymbol{H}^H \right] \right) bits / s / Hz$$

Capacity in realistic channels

Influence of various effects:

- Correlation: LOS component, small angular spread
- Keyholes: uncorrelated components, but low-rank transfer matrix
- Frequency selectivity: gives additional diversity
- Limited number of effective scatterers

Channel knowledge is important for the system

- Channel knowledge at RX
  - unknown
  - known (estimated or perfect)
- Channel knowledge at TX
  - unknown (no channel state information, CSI)
  - average CSI known
  - instantaneous CSI known (estimated or perfect)

Different strategies for different combinations!

Mobile Feedback based CSI

Closed loop control:

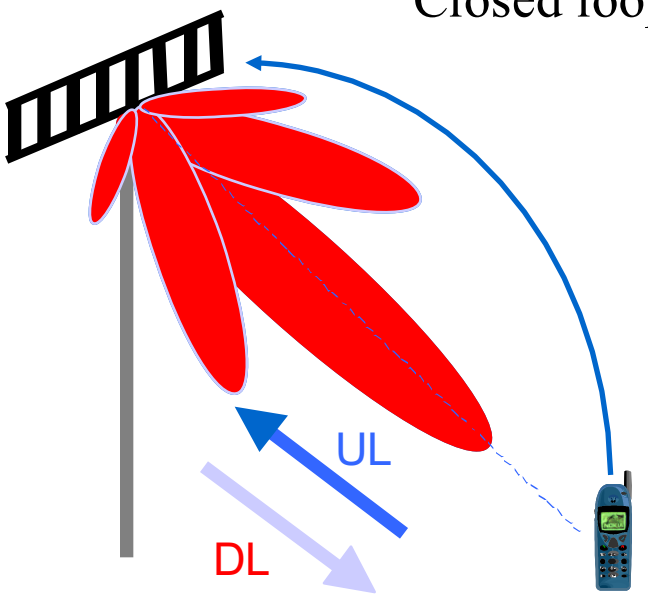

Estimate:

h_{DL}

- MS estimates h_{DL}
- Feedback of DL channel parameters
- Drawbacks:
  - Reduces spectral efficiency
  - Feedback errors (noise, quantization)
  - Sensitivity to
    - high mobile speed
    - terminal implementation