



LUND  
UNIVERSITY

# Wireless Communications Channels


## Lecture 6: Channel Models

**EITN85: Meifang Zhu**(e-mail: [meifang.zhu@eit.lth.se](mailto:meifang.zhu@eit.lth.se))

Department of Electrical and Information Technology, Lund University



# Recap

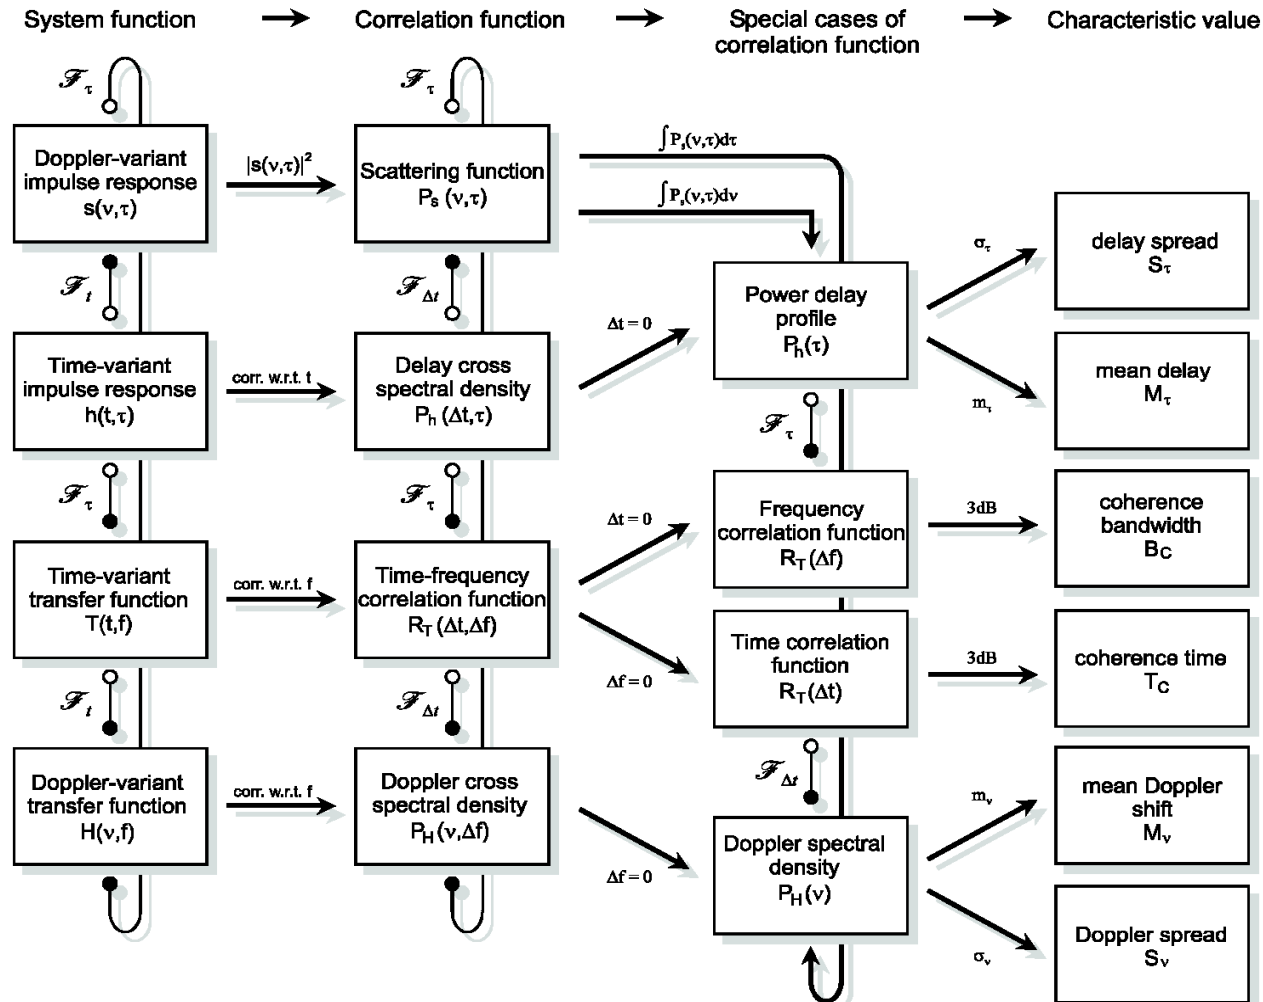

# Lecture contents

---

- Different modelling methods
- Okumura-Hata path loss model
- COST 231 model
- Indoor models
- Wideband models
- COST 207 (GSM/2G model)
- ITU-R model for 3G
- Directional channel models
- Multiple antenna (MIMO) models
- Ray tracing & Ray launching



# Channel Modeling Methods

---

- ❑ **Stored channel impulse responses**
  - ❑ **Channel sounder** based; thus realistic
    - ❑ Different from system-level field trials
  - ❑ Reproducible and thus reliable
  - ❑ Difficult to cover **all** scenarios



Wireless Communication Channels




# Channel Modeling Methods

---

## ❑ **Deterministic channel models**

- ❑ Based on Maxwell's equations
- ❑ **Site specific** and computationally demanding

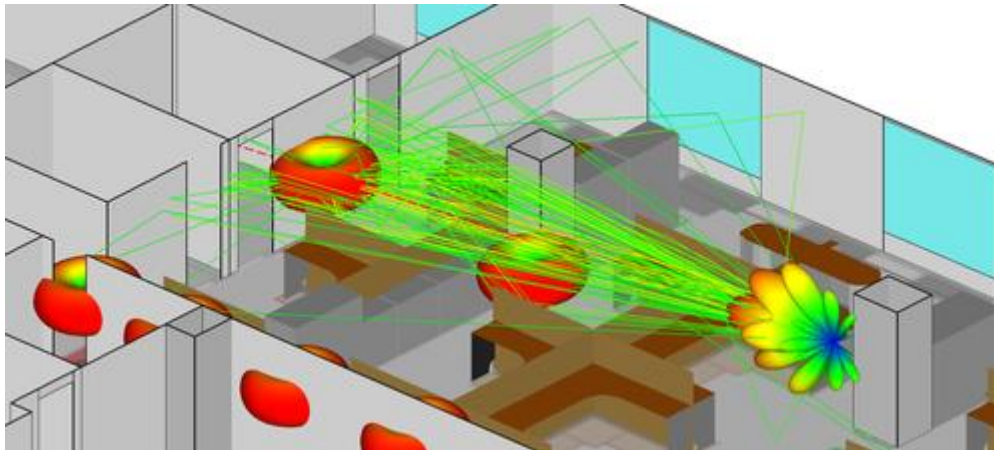


@ remcom

# Channel Modeling Methods

## ❑ Stochastic channel models

- ❑ Describes **distribution** of the field strength over **an area**
- ❑ Mainly used for design and system comparisons

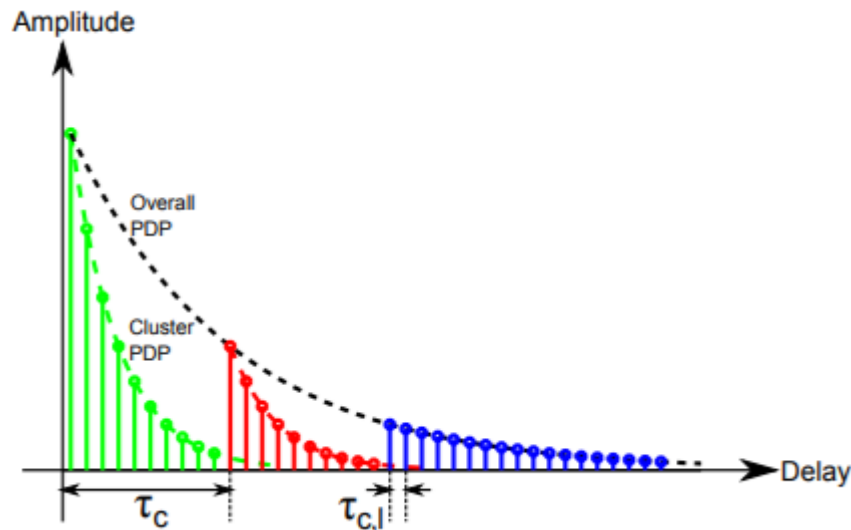



# Narrowband models

## Review of properties

---

- Narrowband models contain "only one" attenuation, which is modeled as a propagation loss, plus large- and small-scale fading.
- Path loss: Often proportional to  $1/d^n$ , where  $n$  is the propagation exponent ( $n$  may be different at different distances).
- Large-scale fading: Log-normal distribution (normal distr. in dB scale)
- Small-scale fading: Rayleigh, Rice, Nakagami distributions ... (of amplitudes and not in dB-scale)



---

# Standard Channel Models





# Standard models for path loss

## Okumura's measurements

---

Extensive measurement campaign in Japan in the 1960's.

Parameters varied during measurements:

$$PL = A + B \log_{10}(d) + C$$


Frequency	100 – 3000 MHz	Dependent on the below factors
Distance	1 – 100 km	
Mobile station height	1 – 10 m	
Base station height	20 – 1000 m	
Environment	medium-size city, large city, etc.	

Results from these measurements are displayed in figures 7.12 – 7.14 in the appendix.



# Okumura's Measurements Pathloss Characterization

FIGURE 7.12 in appendix

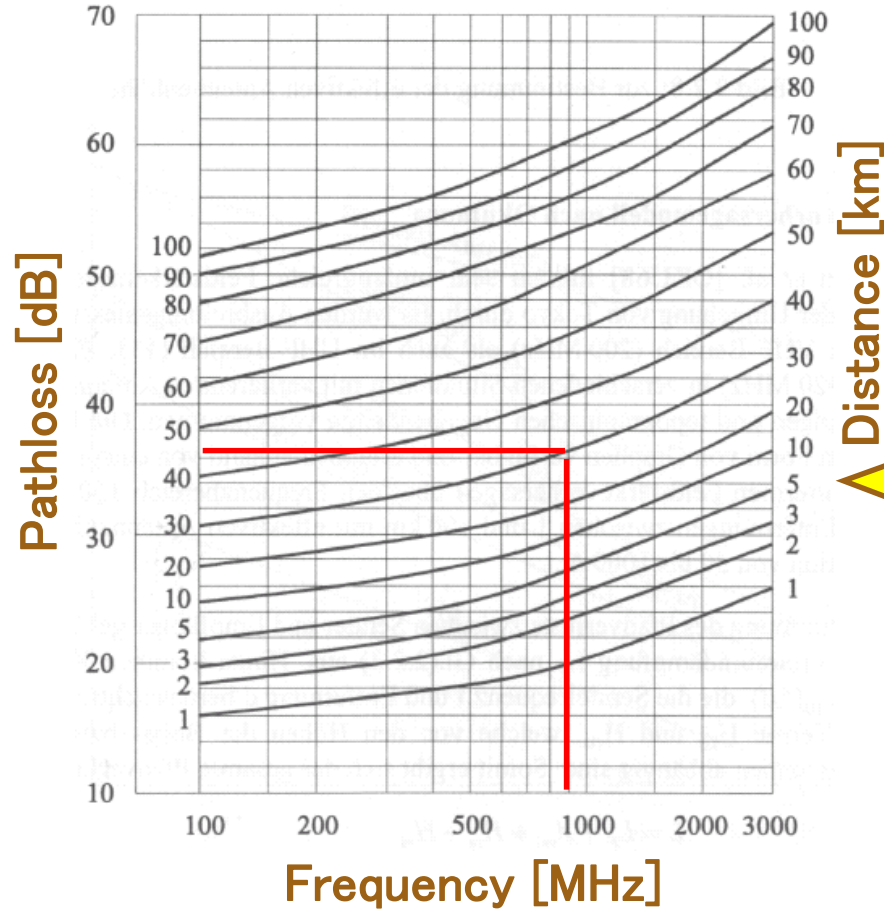

Example

These curves  
are only for  
 $h_b=200$  m and  
 $h_m=3$  m

900 MHz and  
30 km distance



LUND  
UNIVERSITY

# The Okumura-Hata model

## Background

---

In 1980 Hata published a parameterized model, based on Okumura's measurements.

The parameterized model has a smaller range of validity than the measurements by Okumura:

Frequency	150 – 1500 MHz
Distance	1 – 20 km
Mobile station height	1 – 10 m
Base station height	30 – 200 m

# The Okumura-Hata model

## How to calculate prop. loss

$$L_{O-H} = A + B \log(d_{|km}) + C$$

$$A = 69.55 + 26.16 \log(f_{0|MHz}) - 13.82 \log(h_b) - a(h_m)$$

$$B = 44.9 - 6.55 \log(h_b)$$

$h_b$  and  $h_m$   
in meter

	$a(h_m) =$	$C =$
Metropolitan areas	$8.29(\log(1.54h_m))^2 - 1.1$ for $f_0 \leq 200$ MHz $3.2(\log(11.75h_m))^2 - 4.97$ for $f_0 \geq 400$ MHz	0
Small/medium-size cities	$(1.1 \log(f_{0 MHz}) - 0.7)h_m -$ $(1.56 \log(f_{0 MHz}) - 0.8)$	0
Suburban environments		$-2[\log(f_{0 MHz}/28)]^2 - 5.4$
Rural areas		$-4.78[\log(f_{0 MHz})]^2 + 18.33 \log(f_{0 MHz}) - 40.94$



# The COST 231-Walfish-Ikegami model

---

The Okumura-Hata model is not suitable for micro cells or small macro cells, due to its restrictions on distance ( $d > 1$  km).

The COST 231-Walfish-Ikegami model covers much smaller distances, is better suited for calculations on small cells and covers the 1800 MHz band as well.


<b>Frequency</b>	<b>800 – 2000 MHz</b>
<b>Distance</b>	<b>0.02 – 5 km</b>
<b>Mobile station height</b>	<b>1 – 3 m</b>
<b>Base station height</b>	<b>4 – 50 m</b>



# The COST 231-Walfish-Ikegami model

## How to calculate prop. loss

---

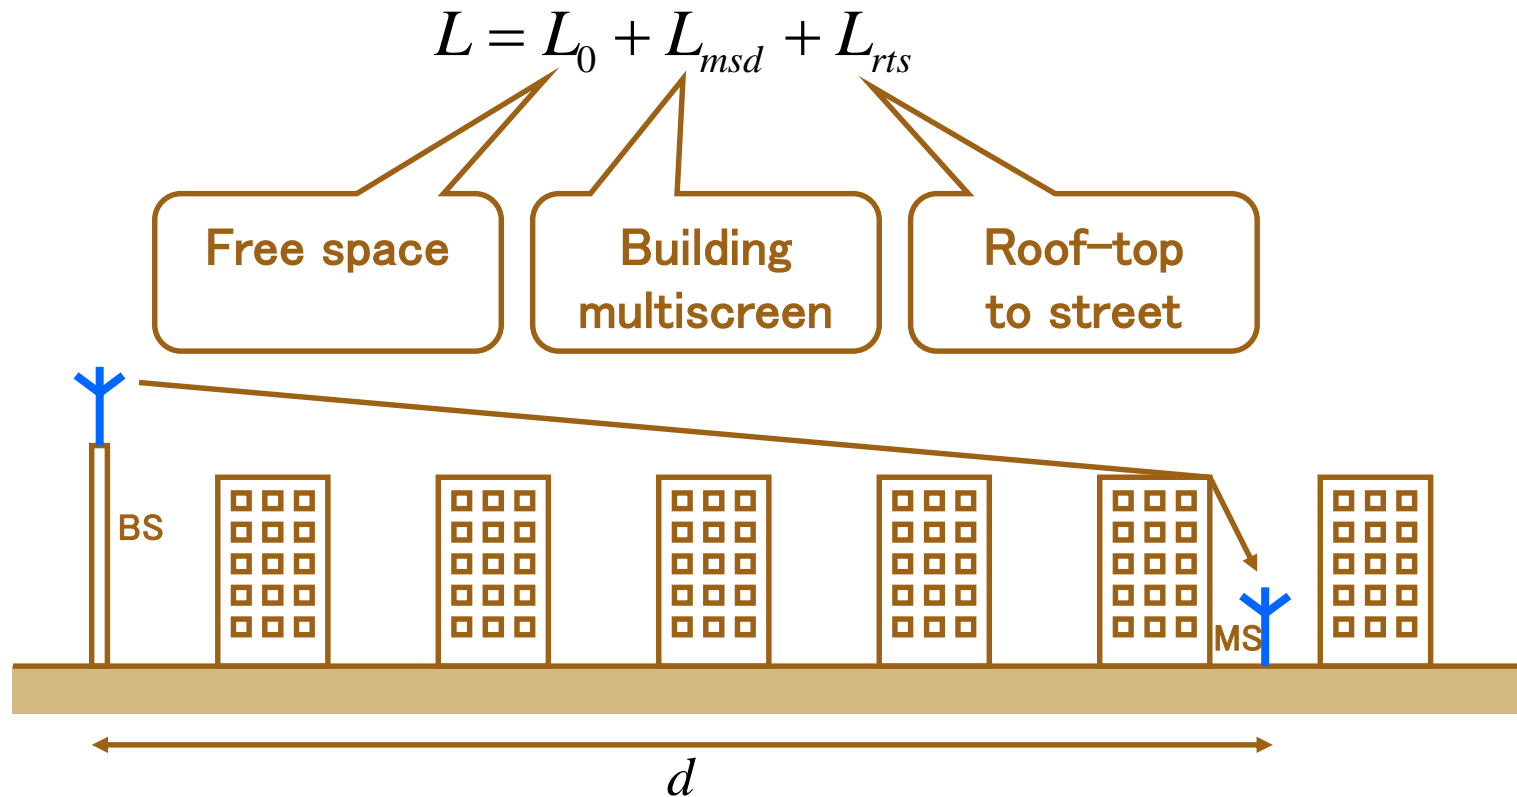

# Motley-Keenan indoor model

---

For indoor environments, the attenuation is heavily affected by the building structure, walls and floors play an important role

$$PL = PL_0 + 10n \log(d/d_0) + F_{\text{wall}} + F_{\text{floor}}$$

distance dependent  
path loss

sum of attenuations  
from walls, 1–20  
dB/wall

sum of attenuation from the  
floors (often larger than wall  
attenuation)

site specific, since it is valid for a particular case





# Wideband models

---

Tapped delay line model often used

$$h(t, \tau) = \sum_{i=1}^N \alpha_i(t) \exp(j\theta_i(t)) \delta(\tau - \tau_i)$$

Often Rayleigh-distributed taps, but might include LOS and different distributions of the tap values

Mean tap power determined by the power delay profile




# Power delay profile

Often described by a single exponential decay


$$P_{sc}(\tau) = \begin{cases} \exp(-\tau / S_\tau) & \tau \geq 0 \\ 0 & \text{otherwise} \end{cases}$$

delay spread

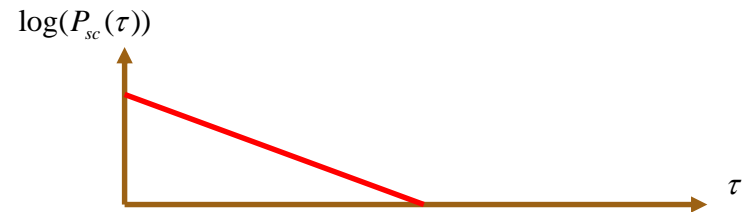

though often there is more than one “cluster”

$$P(\tau) = \begin{cases} \sum_k \frac{P_k^c}{S_{\tau,k}^c} P_{sc}(\tau - \tau_{0,k}^c) & \tau \geq 0 \\ 0 & \text{otherwise} \end{cases}$$

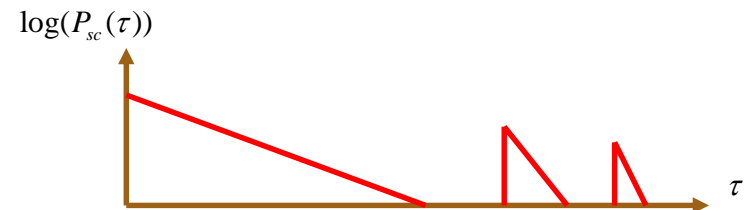

# Arrival time


If the bandwidth is high, the time resolution is large so we might resolve the different multipath components

- Need to model arrival time
- The Saleh-Valenzuela model:

$$h(\tau) = \sum_{l=0}^L \sum_{k=0}^K \alpha_{k,l}(\tau) \delta(\tau - T_l - \tau_{k,l})$$

cluster arrival time  
(Poisson)

ray arrival time  
(Poisson)

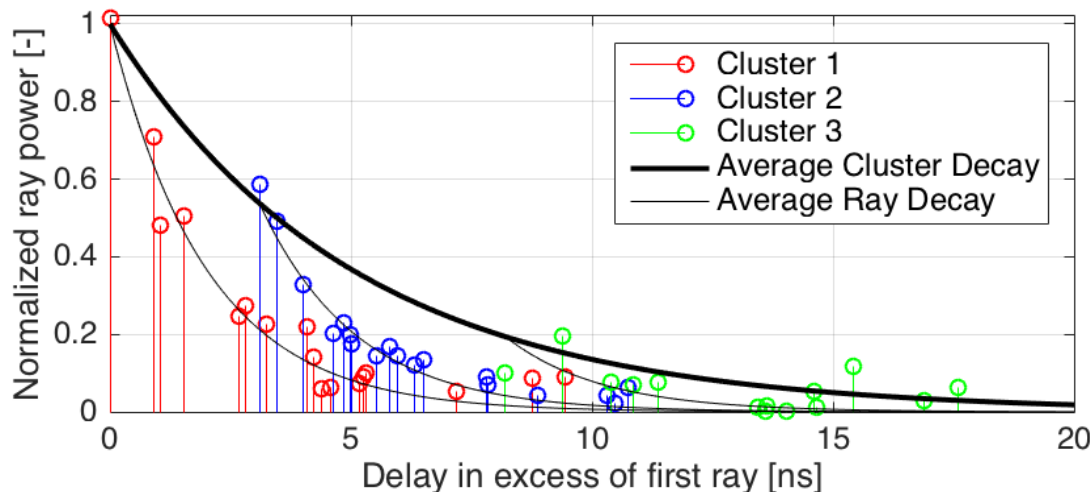

Double-exponential  
ray power:

# Wideband models

## COST 207 model for GSM

---

The COST 207 model specifies:

- FOUR power-delay profiles for different environments.
- FOUR Doppler spectra used for different delays.


It does NOT specify propagation losses for the different environments!



# Wideband models

## COST 207 model for GSM

Four specified power-delay profiles

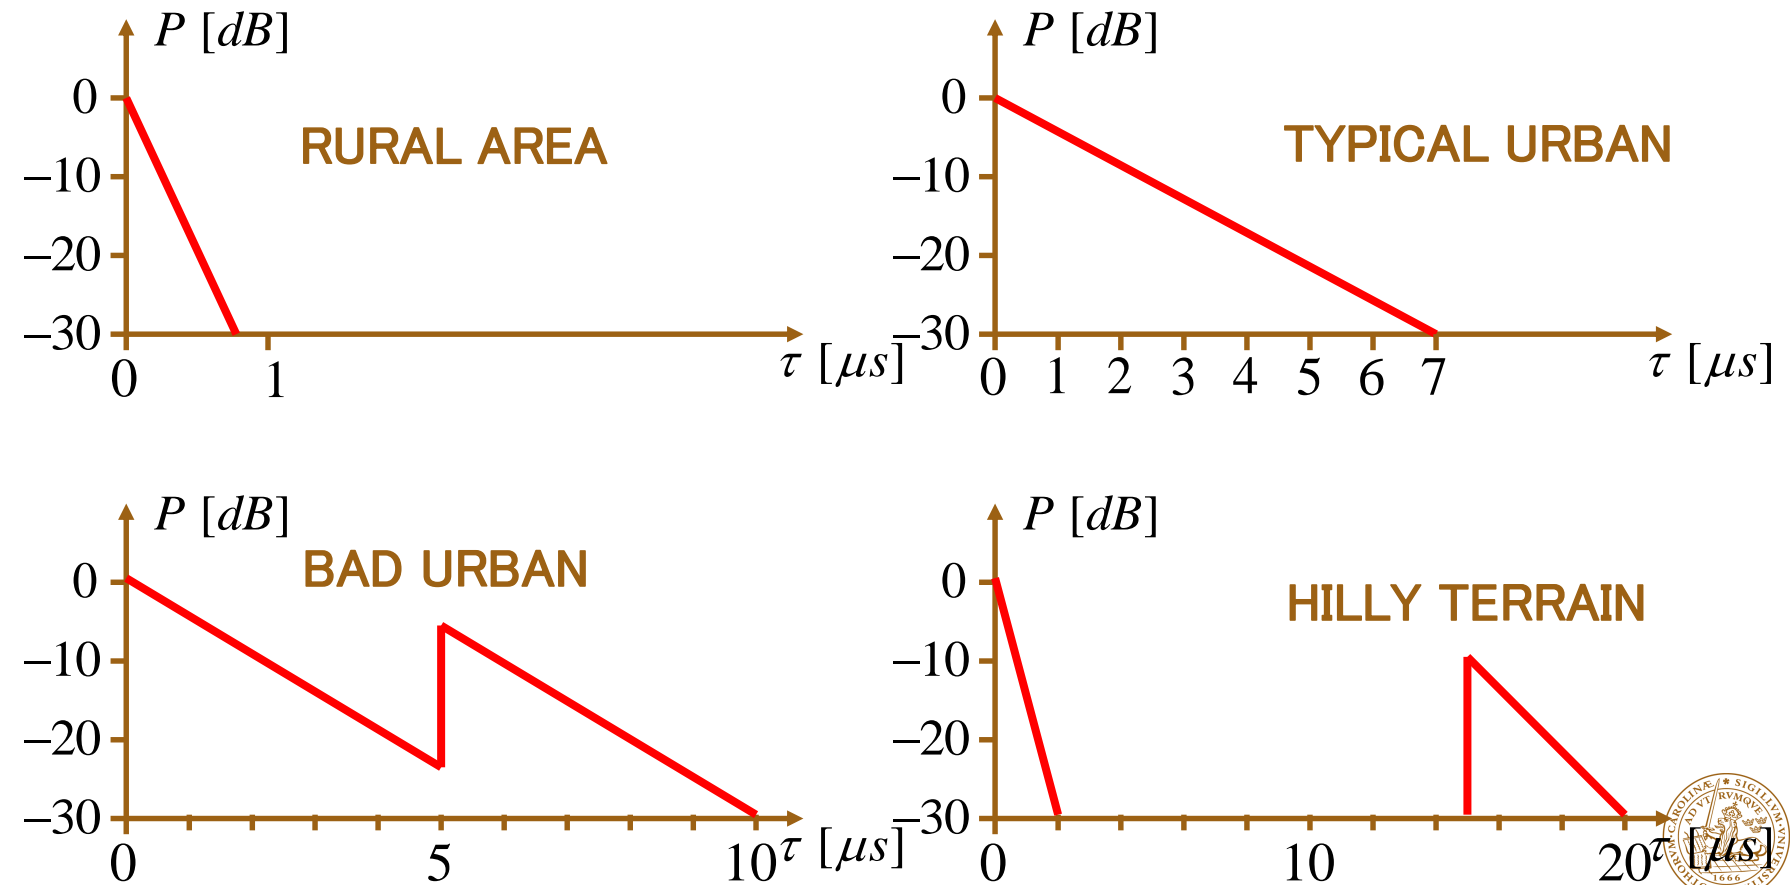


# Wideband models

## COST 207 model for GSM

Four specified  
Doppler spectra


**CLASS**

$\tau_i \leq 0.5 \mu\text{s}$

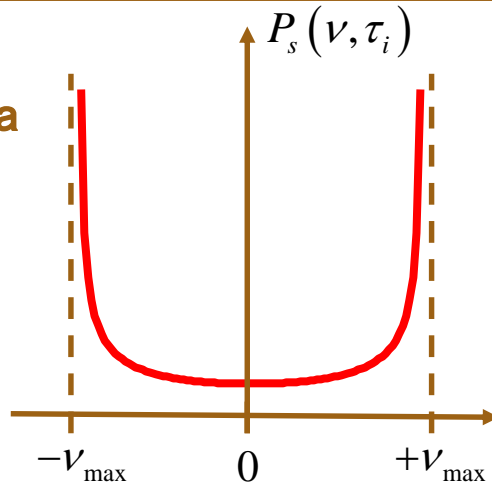


**GAUS1**

$0.5 \mu\text{s} < \tau_i \leq 2 \mu\text{s}$

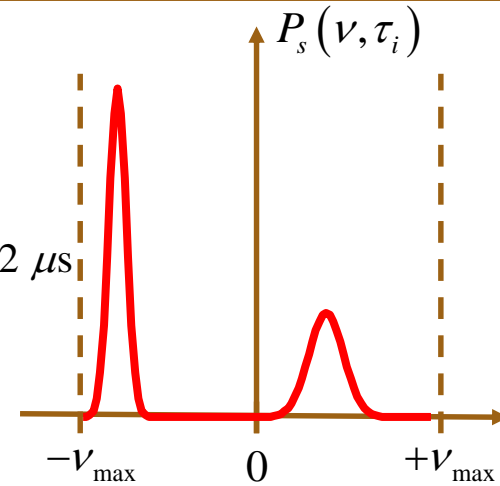


**GAUS2**

$\tau_i > 2 \mu\text{s}$

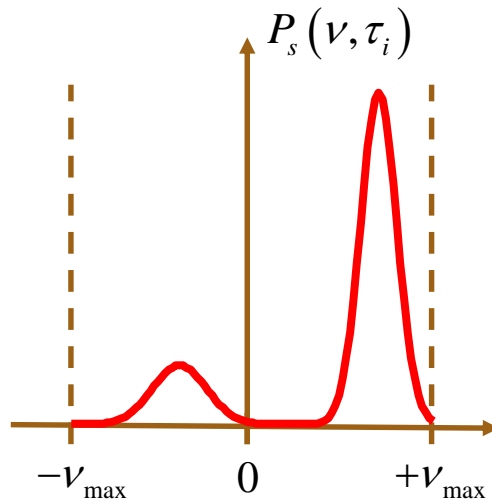



**RICE**  
Shortest  
path in  
rural areas

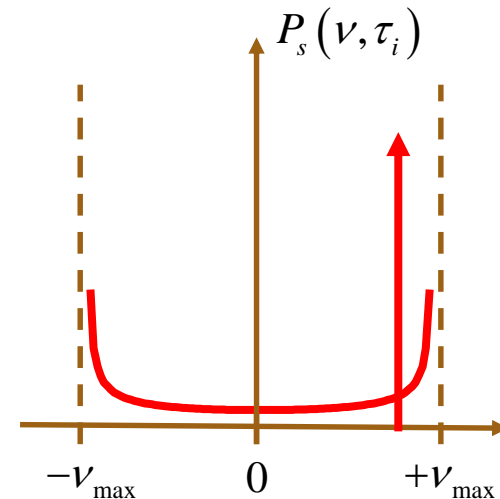

# Wideband models


## COST 207 model for GSM

Doppler spectra: ■ CLASS ■ GAUS1 ■ GAUS2

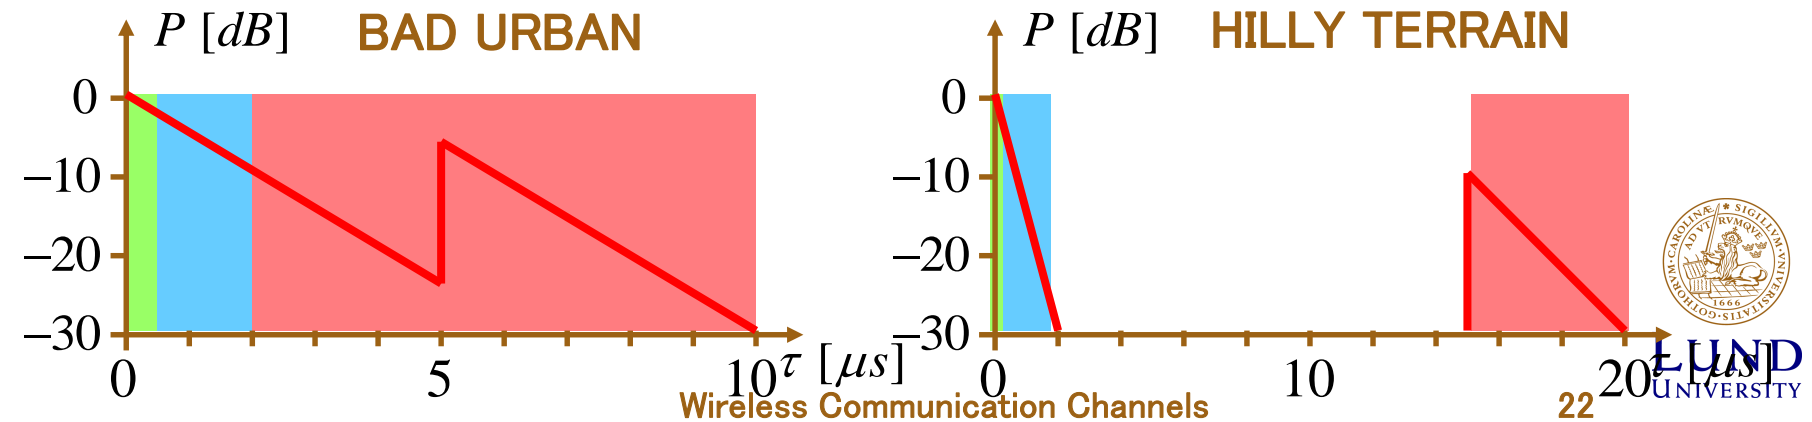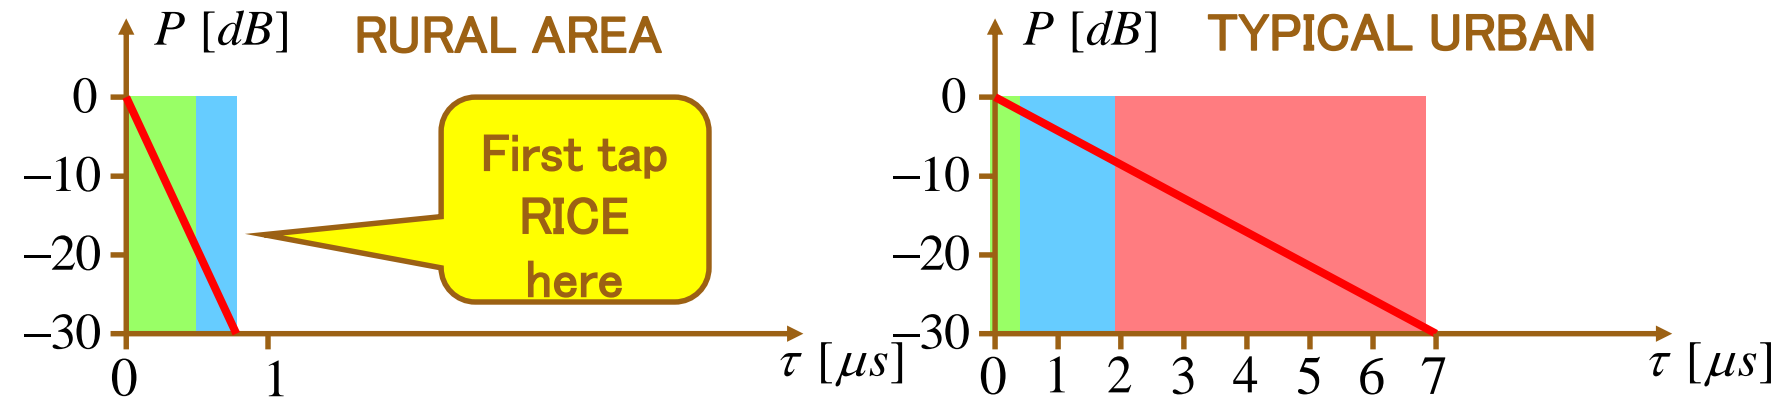



# Transfer function, Typical urban

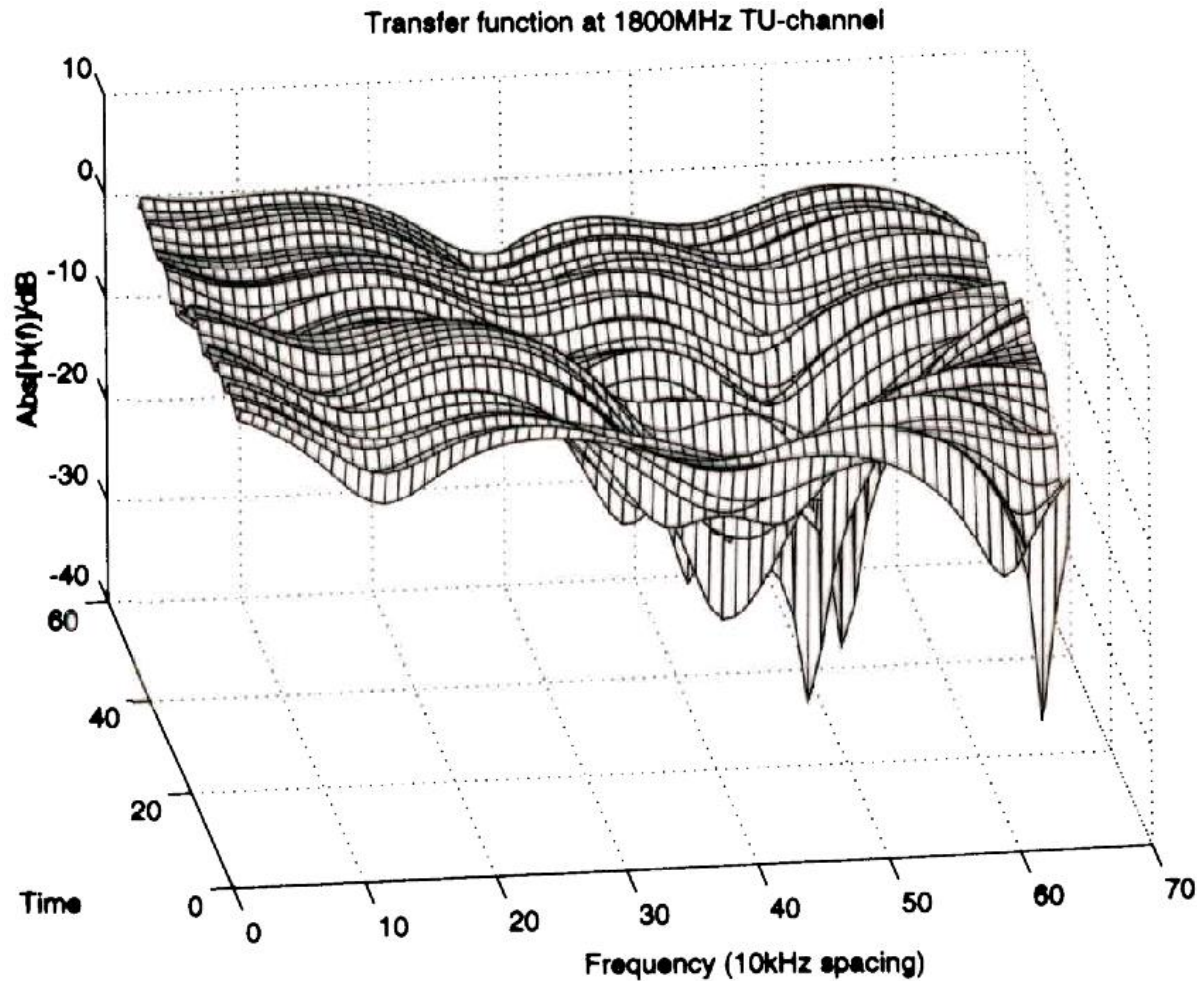

# Wideband models

## ITU-R model for 3G

---

The ITU-R model specifies:

- SIX different tapped delay-line channels for three different scenarios (indoor, pedestrian, vehicular).
- TWO channels per scenario (one short and one long delay spread).
- TWO different Doppler spectra (uniform & classical), depending on scenario.
- THREE different models for propagation loss (one for each scenario).

The standard deviation of the log-normal shadow fading is specified for each scenario.

The autocorrelation of the log-normal shadow fading is specified for the vehicular scenario.



# Wideband models

## ITU-R model for 3G

ns

Tap No.	delay/ns	power/dB	delay/ $\mu$ s	power/dB
<b>INDOOR</b>	<b>CHANNEL A (50%)</b>		<b>CHANNEL B (45%)</b>	
1	0	0	0	0
2	50	-3	100	-3.6
3	110	-10	200	-7.2
4	170	-18	300	-10.8
5	290	-26	500	-18.0
6	310	-32	700	-25.2
<b>PEDESTRIAN</b>	<b>CHANNEL A (40%)</b>		<b>CHANNEL B (55%)</b>	
1	0	0	0	0
2	110	-9.7	200	-0.9
3	190	-19.2	800	-4.9
4	410	-22.8	1200	-8.0
5			2300	-7.8
6			3700	-23.9
<b>VEHICULAR</b>	<b>CHANNEL A (40%)</b>		<b>CHANNEL B (55%)</b>	
1	0	0	0	-2.5
2	310	-1	300	0
3	710	-9	8900	-12.8
4	1090	-10	12900	-10.0
5	1730	-15	17100	-25.2
6	2510	-20	20000	-16.0



# Directional channel models

---

The spatial domain can be used to increase the spectral efficiency of the system

- Smart antennas
- MIMO systems

Need to know directional properties

- How many significant reflection points?
- Which directions?
- Model incoming angle (direction of arrival) and outgoing angle (direction of departure) to scatterers

Model independent of specific antenna pattern



# Double directional impulse response

TX position      RX position      number of multipath components for these positions

$$h(t, \vec{r}_{\text{TX}}, \vec{r}_{\text{RX}}, \tau, \Omega, \Psi) = \sum_{\ell=1}^{N(\vec{r})} h_{\ell}(t, \vec{r}_{\text{TX}}, \vec{r}_{\text{RX}}, \tau, \Omega, \Psi)$$

delay      direction-of-departure      direction-of-arrival

$$h_{\ell}(t, \vec{r}_{\text{TX}}, \vec{r}_{\text{RX}}, \tau, \Omega, \Psi) = |a_{\ell}| e^{j\varphi_{\ell}} \delta(\tau - \tau_{\ell}) \delta(\Omega - \Omega_{\ell}) \delta(\Psi - \Psi_{\ell})$$




# Double directional impulse response with slightly different notation:


$$h_p(\tau, \phi^{\text{Rx}}, \theta^{\text{Rx}}, \phi^{\text{Tx}}, \theta^{\text{Tx}}) = \sum_{n=1}^N \alpha_n \delta(\tau - \tau_n) \\ \times \delta(\phi^{\text{Rx}} - \phi_n^{\text{Rx}}) \delta(\theta^{\text{Rx}} - \theta_n^{\text{Rx}}) \delta(\phi^{\text{Tx}} - \phi_n^{\text{Tx}}) \delta(\theta^{\text{Tx}} - \theta_n^{\text{Tx}})$$

Time and location  
is omitted here!

Departure

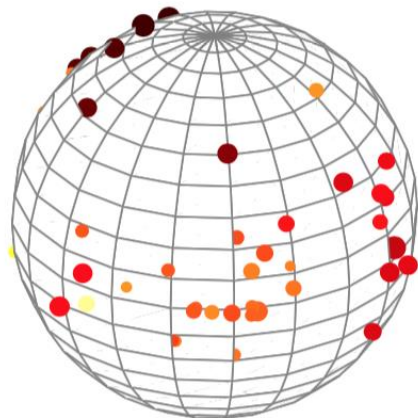


Arrival

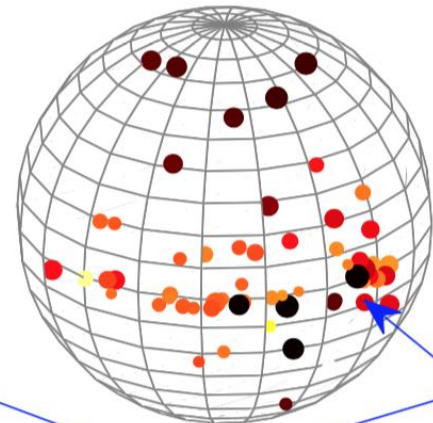

Delay,  $\tau$

# Physical interpretation

---

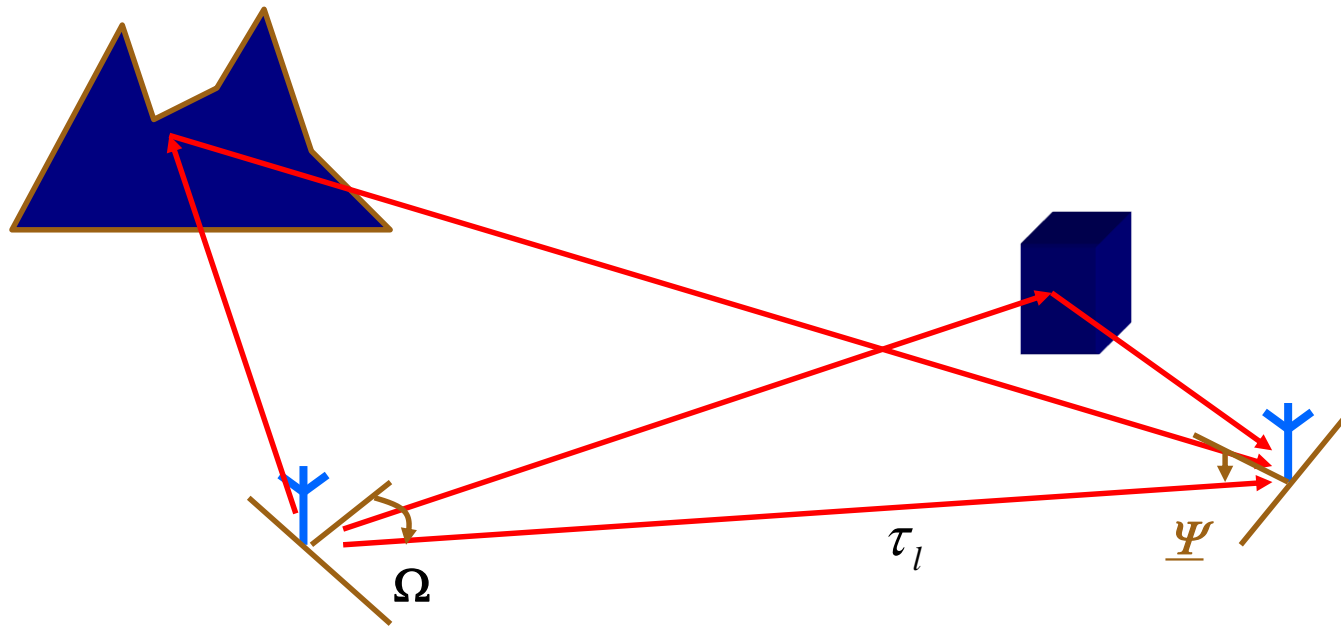





LUND  
UNIVERSITY

# Wireless Communications Channels

## Lecture 6: Channel Models

**EITN85: Meifang Zhu**(e-mail: [meifang.zhu@eit.lth.se](mailto:meifang.zhu@eit.lth.se))

Department of Electrical and Information Technology, Lund University



# Recap: Physical interpretation


---

**By given a channel transfer function of a radio channel, which procedure you gonna take to determine its coherence bandwidth with correlation coefficient defined as 0.5?**



# Recap: Physical interpretation

---

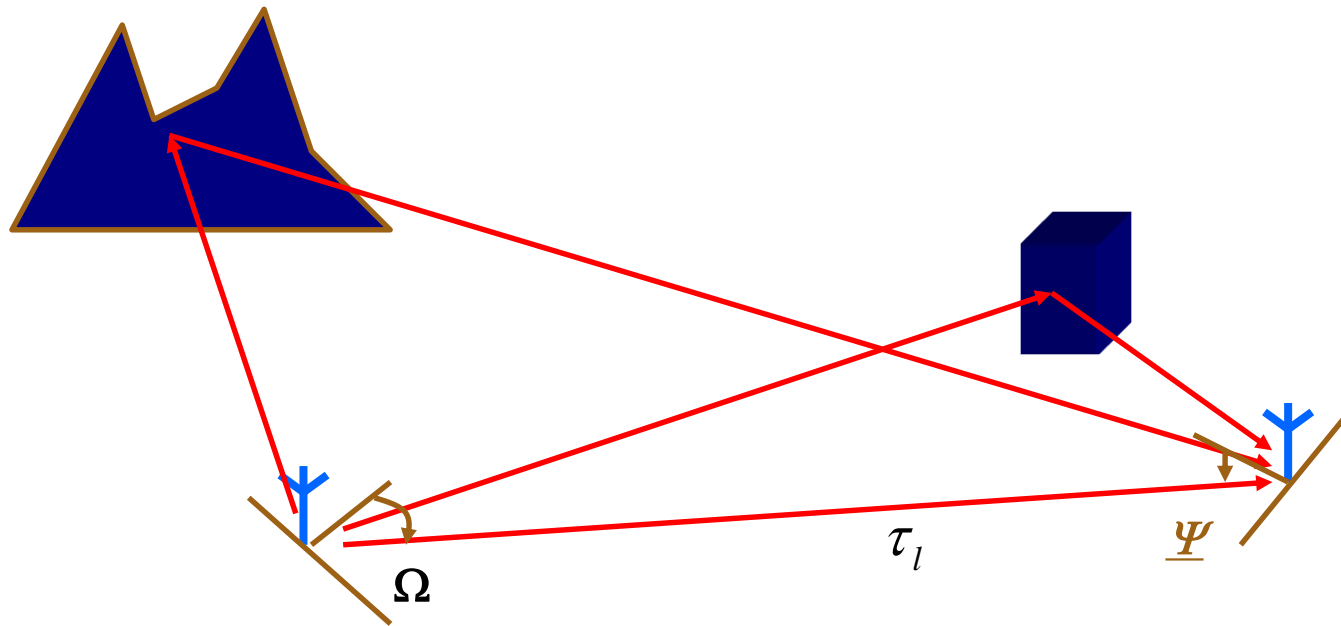


# Recap: Angular spread

$$E\{s^*(\Omega, \Psi, \tau, \nu)s(\Omega', \Psi', \tau', \nu')\} = P_s(\Omega, \Psi, \tau, \nu)\delta(\Omega - \Omega')\delta(\Psi - \Psi')\delta(\tau - \tau')\delta(\nu - \nu')$$

double directional delay power spectrum

$$DDDPS(\Omega, \Psi, \tau) = \int P_s(\Psi, \Omega, \tau, \nu)d\nu$$

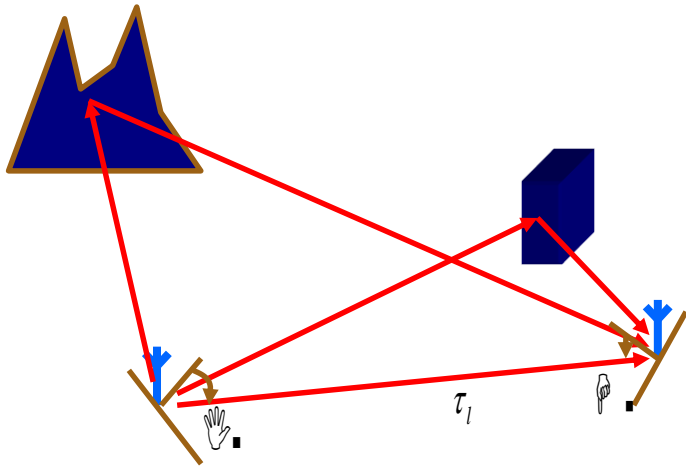

angular delay power spectrum

$$ADPS(\Omega, \tau) = \int DDDPS(\Psi, \Omega, \tau)G_{MS}(\Psi)d\Psi$$

angular power spectrum

$$APS(\Omega) = \int ADPS(\Omega, \tau)d\tau$$

power

$$P = \int APS(\Omega)d\Omega$$



LUND  
UNIVERSITY