



Elements of a wireless network

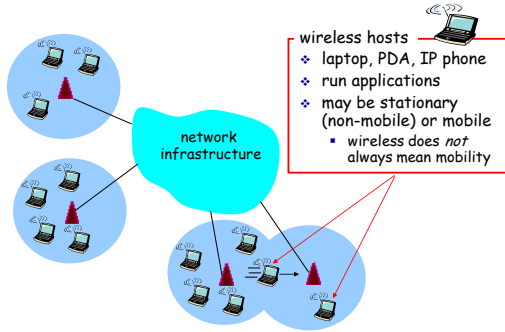

- wireless hosts**
- ❖ laptop, PDA, IP phone
 - ❖ run applications
 - ❖ may be stationary (non-mobile) or mobile
 - wireless does *not* always mean mobility

Wireless, Mobile Networks 6-1


Elements of a wireless network

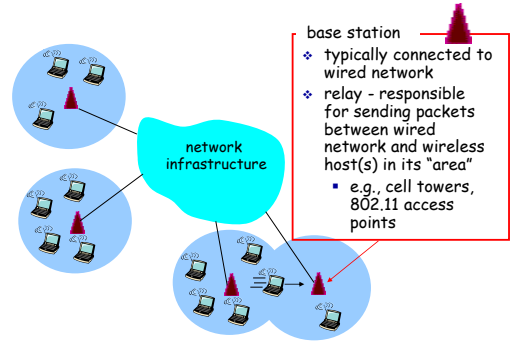

- base station**
- ❖ typically connected to wired network
 - ❖ relay - responsible for sending packets between network and wireless host(s) in its "area"
 - e.g., cell towers, 802.11 access points

Wireless, Mobile Networks 6-2


Elements of a wireless network

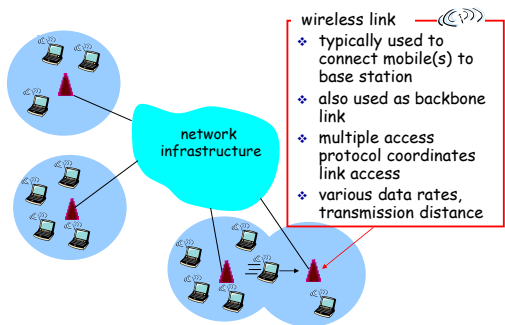

- wireless link**
- ❖ typically used to connect mobile(s) to base station
 - ❖ also used as backbone link
 - ❖ multiple access protocol coordinates link access
 - ❖ various data rates, transmission distance


Wireless, Mobile Networks 6-3

Characteristics of selected wireless link standards

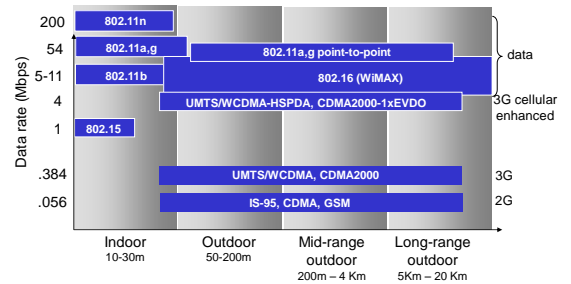

Wireless, Mobile Networks 6-4


Elements of a wireless network

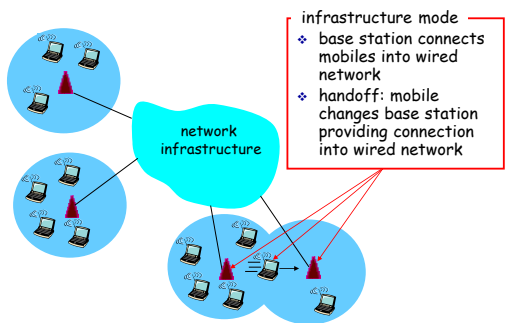

- infrastructure mode**
- ❖ base station connects mobiles into wired network
 - ❖ handoff: mobile changes base station providing connection into wired network

Wireless, Mobile Networks 6-5

Elements of a wireless network

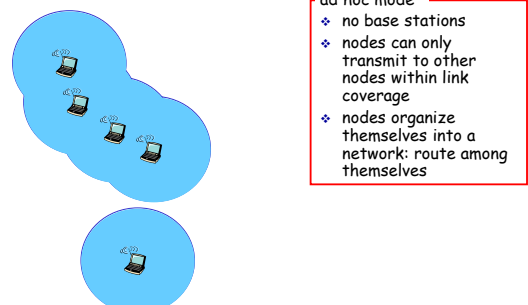

- ad hoc mode**
- ❖ no base stations
 - ❖ nodes can only transmit to other nodes within link coverage
 - ❖ nodes organize themselves into a network: route among themselves

Wireless, Mobile Networks 6-6

Wireless network taxonomy

	single hop	multiple hops
infrastructure (e.g., APs)	host connects to base station (WiFi, WiMAX, cellular) which connects to larger Internet	host may have to relay through several wireless nodes to connect to larger Internet: <i>mesh net</i>
no infrastructure	no base station, no connection to larger Internet (Bluetooth, ad hoc nets)	no base station, no connection to larger Internet. May have to relay to reach other a given wireless node MANET, VANET

Wireless, Mobile Networks 6-7

Wireless Link Characteristics (1)

Differences from wired link


- **decreased signal strength:** radio signal attenuates as it propagates through matter (path loss)
- **interference from other sources:** standardized wireless network frequencies (e.g., 2.4 GHz) shared by other devices (e.g., phone); devices (motors) interfere as well
- **multipath propagation:** radio signal reflects off objects ground, arriving at destination at slightly different times

.... make communication across (even a point to point) wireless link much more "difficult"

Wireless, Mobile Networks 6-8

Wireless Link Characteristics (2)


- ❖ SNR: signal-to-noise ratio
 - larger SNR - easier to extract signal from noise (a "good thing")
- ❖ **SNR versus BER (Bit Error Rate) tradeoffs**
 - **given physical layer:** increase power -> increase SNR -> decrease BER
 - **given SNR:** choose physical layer that meets BER requirement, giving highest throughput
 - SNR may change with mobility: dynamically adapt physical layer (modulation technique, rate)



Wireless, Mobile Networks 6-9


Wireless network characteristics

Multiple wireless senders and receivers create additional problems (beyond multiple access):



Hidden terminal problem

- ❖ B, A hear each other
- ❖ B, C hear each other
- ❖ A, C can not hear each other means A, C unaware of their interference at B



Signal attenuation:

- ❖ B, A hear each other
- ❖ B, C hear each other
- ❖ A, C can not hear each other interfering at B


Wireless, Mobile Networks 6-10

IEEE 802.11 Wireless LAN

- ❖ **802.11b**
 - 2.4-5 GHz unlicensed spectrum
 - up to 11 Mbps
 - ❖ **802.11a**
 - 5-6 GHz range
 - up to 54 Mbps
 - ❖ **802.11g**
 - 2.4-5 GHz range
 - up to 54 Mbps
 - ❖ **802.11n:** multiple antennae
 - 2.4-5 GHz range
 - up to 200 Mbps
-
- ❖ all use CSMA/CA for multiple access
 - ❖ all have base-station and ad-hoc network versions

Wireless, Mobile Networks 6-11

802.11 LAN architecture



- ❖ wireless host communicates with base station
 - base station = access point (AP)
- ❖ **Basic Service Set (BSS)** (aka "cell") in infrastructure mode contains:
 - wireless hosts
 - access point (AP): base station
 - ad hoc mode: hosts only


Wireless, Mobile Networks 6-12

802.11: Channels, association

- ❖ 802.11b: 2.4GHz-2.485GHz spectrum divided into 11 channels at different frequencies
 - AP admin chooses frequency for AP
 - interference possible: channel can be same as that chosen by neighboring AP!
- ❖ host: must *associate* with an AP
 - scans channels, listening for *beacon frames* containing AP's name (SSID) and MAC address
 - selects AP to associate with
 - may perform authentication
 - will typically run DHCP to get IP address in AP's subnet

Wireless, Mobile Networks 6-13

802.11: passive/active scanning

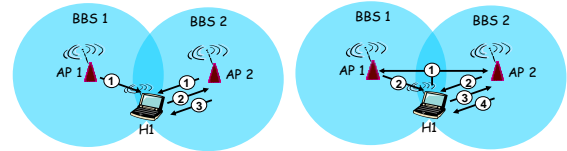

Passive Scanning:

- (1) beacon frames sent from APs
- (2) association Request frame sent: H1 to selected AP
- (3) association Response frame sent: H1 to selected AP


Active Scanning:

- (1) Probe Request frame broadcast from H1
- (2) Probe response frame sent from APs
- (3) Association Request frame sent: H1 to selected AP
- (4) Association Response frame sent: H1 to selected AP

Wireless, Mobile Networks 6-14

IEEE 802.11: multiple access

- ❖ avoid collisions: 2+ nodes transmitting at same time
- ❖ 802.11: CSMA - sense before transmitting
 - don't collide with ongoing transmission by other node
- ❖ 802.11: *no* collision detection!
 - difficult to receive (sense collisions) when transmitting due to weak received signals (fading)
 - can't sense all collisions in any case: hidden terminal, fading
 - goal: *avoid collisions*: CSMA/C(ollision)A(voidance)



Wireless, Mobile Networks 6-15


IEEE 802.11 MAC Protocol: CSMA/CA

802.11 sender

- 1 if sense channel idle for **DIFS** then transmit entire frame (no CD)
- 2 if sense channel busy then start random backoff time timer counts down while channel idle transmit when timer expires if no ACK, increase random backoff interval, repeat 2

802.11 receiver

- if frame received OK return ACK after **SIFS** (ACK needed due to hidden terminal problem)



Wireless, Mobile Networks 6-16


Avoiding collisions (more)

- idea:* allow sender to "reserve" channel rather than random access of data frames: avoid collisions of long data frames
- ❖ sender first transmits *small* request-to-send (RTS) packets to BS using CSMA
 - RTSs may still collide with each other (but they're short)
 - ❖ BS broadcasts clear-to-send CTS in response to RTS
 - ❖ CTS heard by all nodes
 - sender transmits data frame
 - other stations defer transmissions

avoid data frame collisions completely using small reservation packets!


Wireless, Mobile Networks 6-17

Collision Avoidance: RTS-CTS exchange

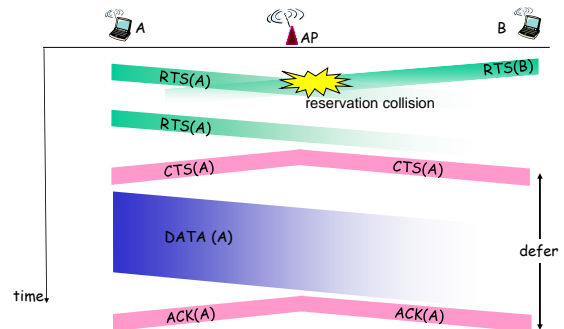


Wireless, Mobile Networks 6-18

802.11 frame: addressing

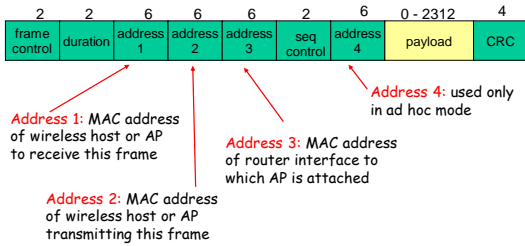


Wireless, Mobile Networks 6-19

802.11 frame: addressing

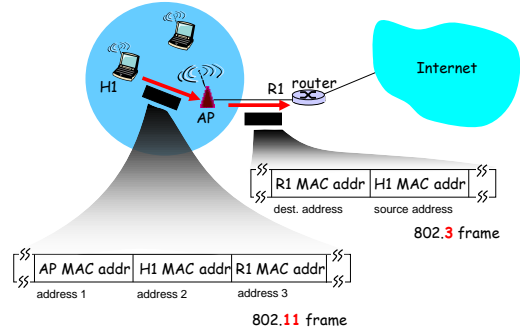

Wireless, Mobile Networks 6-20


802.11 frame: more

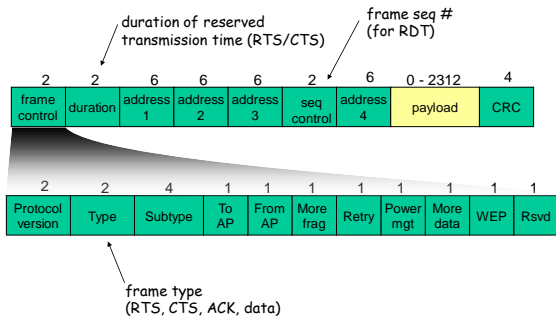

Wireless, Mobile Networks 6-21

802.11: mobility within same subnet

- H1 remains in same IP subnet: IP address can remain same
- switch: which AP is associated with H1?
 - self-learning (Ch. 5): switch will see frame from H1 and "remember" which switch port can be used to reach H1




Wireless, Mobile Networks 6-22

802.11: advanced capabilities

Rate Adaptation

- base station, mobile dynamically change transmission rate (physical layer modulation technique) as mobile moves, SNR varies



- SNR decreases, BER increase as node moves away from base station
- When BER becomes too high, switch to lower transmission rate but with lower BER

Legend:
 - - - QAM256 (8 Mbps)
 - - - QAM16 (4 Mbps)
 - - - BPSK (1 Mbps)
 ● operating point

Wireless, Mobile Networks 6-23

802.11: advanced capabilities


Power Management

- node-to-AP: "I am going to sleep until next beacon frame"
 - AP knows not to transmit frames to this node
 - node wakes up before next beacon frame
- beacon frame: contains list of mobiles with AP-to-mobile frames waiting to be sent
 - node will stay awake if AP-to-mobile frames to be sent; otherwise sleep again until next beacon frame

Wireless, Mobile Networks 6-24

802.15: personal area network


- ❖ less than 10 m diameter
- ❖ replacement for cables (mouse, keyboard, headphones)
- ❖ ad hoc: no infrastructure
- ❖ master/slaves:
 - slaves request permission to send (to master)
 - master grants requests
- ❖ 802.15: evolved from Bluetooth specification
 - 2.4-2.5 GHz radio band
 - up to 721 kbps



Wireless, Mobile Networks 6-25

802.16: WiMAX


- ❖ like 802.11 & cellular: base station model
 - transmissions to/from base station by hosts with omnidirectional antenna
 - base station-to-base station backhaul with point-to-point antenna
- ❖ unlike 802.11:
 - range ~ 6 miles ("city rather than coffee shop")
 - ~14 Mbps

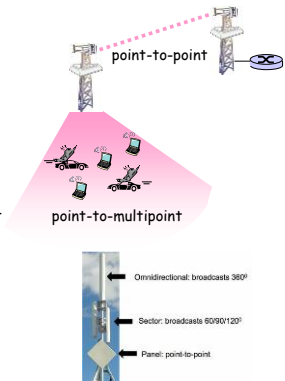

Wireless, Mobile Networks 6-26

802.16: WiMAX: downlink, uplink scheduling

- ❖ transmission frame
 - down-link subframe: base station to node
 - uplink subframe: node to base station

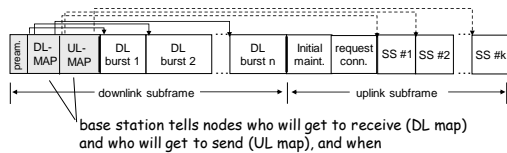

- ❖ WiMAX standard provide mechanism for scheduling, but not scheduling algorithm

Wireless, Mobile Networks 6-27